

# ***SOUTH AFRICAN***



# ***CIVIL AVIATION AUTHORITY***

## **Accident and Incident Investigations Guidance Manual**

### **PART 2 Reporting**

Version: Amendment 1  
Latest revision: **01**  
Document Classification: Restricted

Effective Date: **01 April 2016**  
Issue Number: **Issue 1**  
Page 1 of 62





**Manual of Procedure  
Accidents and Incidents Investigation Division**

## References

Because this manual deals with both accident and incident investigations and, for reasons of brevity, the term “accident investigation”, as used herein, applies equally to “incident investigation”.

The following documents referenced and may provide additional information and guidance material on related subjects:

1. *Civil Aviation Act No 13 of 2009*
2. *Civil Aviation Regulations 2011*
3. *ICAO Annex 13 — Aircraft Accident and Incident Investigation;*
4. *ICAO Doc 9962 — Manual of Accident and Incident Investigation Policies and Procedures;*
5. *ICAO Doc 9946 — Manual on Regional Accident and Incident Investigation Organization;*
6. *ICAO Doc 9683 — Human Factors Training Manual;*
7. *ICAO Doc 8984 — Manual of Civil Aviation Medicine;*
8. *ICAO Circular 315 — Hazards at Aircraft Accident Sites;*
9. *ICAO Circular 298 — Training Guidelines for Aircraft Accident Investigators; and*
10. *ICAO Circular 240 — Human Factors Digest No. 7 — Investigation of Human Factors in Accidents and Incidents.*

Version: Amendment 1  
Latest revision: **01**  
Document Classification: Restricted

Effective Date: **01 April 2016**  
Issue Number: **Issue 1**  
Page 4 of 62

**Manual of Procedure  
Accidents and Incidents Investigation Division**

## **Chapter 1 THE FINAL REPORT**

### **1.1 GENERAL**

1.1.1 The Final Report of an aircraft accident investigation is the foundation for initiating the safety actions which are necessary to prevent further accidents from similar causes. Therefore, the Final Report on an accident must establish in detail what happened, how it happened and why it happened. The findings, causes and/or contributing factors of the Final Report should lead to safety recommendations so that appropriate preventive measures can be taken.

1.1.2 The Final Report should provide:

- a) a record of all the relevant facts (including any conflicting evidence);
- b) an analysis of the relevant facts;
- c) conclusions in the form of findings, causes and/or contributing factors; and
- d) safety recommendations.

The findings, causes and/or contributing factors of a Final Report should point clearly to the safety issues that need to be addressed.

1.1.3 The Final Report is usually the report compiled by the investigator-in-charge for the AIID as directed by the Executive. The report should cover in detail all relevant aspects of the investigation. When the investigation of an accident is organized by establishing specialized groups, each group chairperson should submit a written report to the investigator-in-charge together with all supporting documentation and data covering the facts and findings established. The Final Report will be drafted based, to a large extent, on the reports of the various groups. The investigator-in-charge is responsible for ensuring that the Final Report is written in a consistent and uniform style.

1.1.4 The investigation of a general aviation accident seldom requires organization into groups. Such investigations are usually carried out by one or two investigators. As in the case of a major investigation, the responsibility for the completeness and quality of the Final Report rests with the investigator-in-charge and the Executive who is ultimately accountable for such report.

### **1.2 GROUP REPORTS**

In consultation with the group members, the group chairperson is responsible for scrutinizing the evidence gathered in relation to the tasks assigned to the group and for drafting a group report, which presents all the facts relevant to the activities of the group. Also, the group chairperson should draft an analysis of the facts that the group has established, draft the findings of the group's investigation and make proposals for safety recommendations. A group report should be presented in the format outlined in 1.2.1 to 1.2.5.

#### **1.2.1 Introduction**

This section gives brief identification details of the accident and lists the names, titles and affiliations of the group members. Matters of organization, such as the forming of subgroups to handle specific tasks within the terms of reference of the group, should be explained. For example, in the case of the Operations Group, subgroups such as a Witness Group and a Performance Group are sometimes formed. The terms of reference for the group and subgroups and brief details of the time and location of investigation activities should also be recorded in this section.

Version: Amendment 1  
Latest revision: **01**  
Document Classification: Restricted

Effective Date: **01 April 2016**  
Issue Number: **Issue 1**

Page 5 of 62

# **Manual of Procedure Accidents and Incidents Investigation Division**

## **1.2.2 Investigation**

The facts, conditions and circumstances established by the group should be presented under appropriate headings describing the areas investigated. For example, in the case of the Operations Group, headings would include crew histories, flight planning, dispatch, and aircraft mass and balance. All the relevant facts, whether or not considered significant to the findings of the group, must be included. Relevant documentation should be attached to the group report.

## **1.2.3 Analysis**

The analysis discusses the significance of the facts stated in the previous section of the group report and presents the group's analysis of those facts as they pertain to the terms of reference of the group. This information should be presented in a logical way that leads to and supports the findings.

## **1.2.4 Conclusions**

The conclusions section of the group report should contain the substantiated findings of the group's investigation. An indication of the findings of the group which are considered to be factors in the accident will assist the investigator-in-charge in the drafting of the Final Report.

## **1.2.5 Safety recommendations**

The group report should include information on any safety issues established, safety actions already taken, proposals for safety recommendations and for other forms of safety action, as appropriate.

## **1.3 FORMAT AND CONTENT OF THE FINAL REPORT**

1.3.1 An investigation into an aircraft accident is not complete until all the relevant facts revealed by the investigation, the analysis of the facts, the conclusions and the safety recommendations have been recorded in the Final Report. The Final Report should be structured logically and written in clear and concise language. The report should explain what happened, how it happened, and why the accident happened, and it should address the safety issues involved. A standardized format of the Final Report assists in the production of a complete and reliable record of the investigation of the accident.

1.3.2 In a major investigation, the investigator-in-charge receives the group reports and is responsible for the development and the drafting of the Final Report. The Final Report should be a comprehensive report of the whole investigation. The factual information collected during the investigation should form the basis for the analysis section of the report, which leads to and supports the establishment of the findings, causes and/or contributing factors, and safety recommendations. The standardized format for the Final Report, which is contained in the Appendix to Annex 13 and in CAR 2011, Part 12, provides a well-structured record of the investigation. The Final Report contains five parts: Introduction (Title and Synopsis), Factual Information, Analysis, Conclusions (Findings, Causes and/or Contributing Factors) and Safety Recommendations.

**Manual of Procedure  
Accidents and Incidents Investigation Division**

1.3.3 Detailed guidance on the format and content of the Final Report is at Appendix 1 to Chapter 1. Appendix 2 provides guidance on report-writing conventions, and Appendix 3 presents a list of symbols and abbreviations which might be used in a Final Report. Appendix 4 contains a list of descriptive technical and Human Factors terms and their definitions while Appendix 5 lists examples of findings that might be used in accident reports.

1.3.4 The Final Report of an investigation, including its recommendations, is the catalyst for preventing further occurrences. Therefore, the Final Report must establish in detail what happened, how it happened and why it happened. For reporting on small investigations, many States have created abbreviated report formats that contain only the history of flight, information on the deficiencies discovered by the investigation, analysis of the factors contributing to the occurrence, and findings related to the deficiencies. Short reports have some advantages, including the reduction of resources required for the investigation and of the time required to produce the Final Report.

#### **1.4 CONSULTATION ON THE DRAFT FINAL REPORT**

1.4.1 In accordance with Annex 13 and CAR 2011, Part 12, the Executive-AIID referred to as the Executive or the IIC shall send a copy of the draft Final Report to the State which instituted the investigation and to all States that participated in the investigation, inviting their significant and substantiated comments on the report. The Executive should also send copies of the draft Final Report to the operator and the organizations responsible for type design and final assembly of the aircraft, through the State of the Operator, the State of Design and the State of Manufacture, respectively, in order to enable the operator and such organizations to submit comments on the draft Final Report. When sending the draft Final Report to recipient States, the Executive should consider using the most appropriate means available, such as facsimile, e-mail, courier service or express mail. When the draft Final Report is sent by electronic means, secure transmission methods should be used, when available.

1.4.2 AIID or any other recipient States shall not circulate, release or give access to a draft report or any part thereof, any group reports or any other investigation documentation obtained during an investigation of an accident, without the express consent of the Executive or the investigating State which, unless such reports or documents have already been published or released by Executive.

1.4.3 If the Executive receives comments within sixty days of the date of the transmittal letter, it shall either amend the draft Final Report to include the substance of the comments received or, if desired by the State that provided the comments, append the comments to the Final Report. Usually, comments to be appended to the Final Report are restricted to non-editorial, specific technical aspects of the Final Report upon which no agreement could be reached.

1.4.4 If the Executive receives no comments within sixty days, he/she shall issue the Final Report, unless an extension of that period has been agreed by the Executive and the States concerned.

#### **1.5 RELEASE AND DISTRIBUTION OF THE FINAL REPORT**

1.5.1 The Executive: Accident and Incident Investigations shall release the Final Report with its safety recommendation in the shortest possible time and, if possible, within twelve months of the date of the occurrence. If the report cannot be released within twelve months, the he/she shall release an interim statement or use some other means detailing the progress of the investigation and any safety issues raised.

**Manual of Procedure  
Accidents and Incidents Investigation Division**

1.5.2 In addition to the release and distribution of the Final Report within the South Africa, the Executive: Accident and Incident Investigations shall send the Final Report with a minimum of delay to:

- a) the State which instituted the investigation;
- b) the State of Registry;
- c) the State of the Operator;
- d) the State of Design;
- e) the State of Manufacture;
- f) any State having suffered fatalities or serious injuries to its citizens;
- g) any State which provided relevant information, significant facilities or experts; and
- h) ICAO, if the involved aircraft is of a maximum mass of over 5 700 kg.

## **1.6 RELEASE AND DISTRIBUTION OF SAFETY RECOMMENDATIONS**

1.6.1 At any stage of the investigation of an accident or incident, the IIC through the Executive: Accident and Incident Investigations shall recommend in a dated transmittal correspondence to the appropriate investigating authorities, including those in other States, and to ICAO when ICAO documents are involved, any preventive action that he/she considers necessary to be taken promptly to enhance aviation safety. The draft and final report shall include safety recommendations issued during investigation and on completion of the investigation.

1.6.2 The Executive: Accident and Incident Investigations shall inform the investigating State, within ninety days of the date of the transmittal correspondence, of the preventive action taken or under consideration, or the reasons why no action will be taken.

1.6.3 The Executive: Accident and Incident Investigations shall implement procedures to record the responses to the safety recommendation issued. On receipt of safety recommendation the Executive: Accident and Incident Investigations shall implement procedures to monitor the progress of the action taken in response to that safety recommendation.

1.6.4 The Executive: Accident and Incident Investigations shall inform the Accident Investigation Section of ICAO's Air Navigation Bureau of safety recommendations of global concern (SRGC) issued, as well as the responses received concerning these recommendations. An SRGC is defined as "a safety recommendation made to a State civil aviation authority, to a regional certification authority, or to ICAO regarding a systemic deficiency having a probability of recurrence with potential for significant consequences, and requiring timely action to improve safety.

1.6.5 An SRGC would meet one or more of the following criteria:

- a) the deficiency underlying the recommendation is systemic and not solely a local issue;
- b) the probability of recurrence of the accident and the adverse consequences are high;
- c) the risk to persons, equipment and/or environment is high;
- d) the urgency for taking effective remedial safety action is high;
- e) there is a history of recurrence of the relevant deficiency;
- f) the deficiency underlying the recommendation constitutes a risk to the airworthiness, design, manufacture, maintenance, operation and/or regulation of the involved aircraft type;
- g) the deficiency underlying the recommendation constitutes a risk to more than one aircraft type, to more than one operator, to more than one manufacturer and/or to more than one State; and

Version: Amendment 1

Effective Date: **01 April 2016**

Latest revision: **01**

Issue Number: **Issue 1**

Document Classification: Restricted

Page 8 of 62



# **Manual of Procedure Accidents and Incidents Investigation Division**

h) the mitigation of the risks associated with the deficiency will require coordinated efforts of more than one entity of the air transport industry, such as civil aviation authority(ies), manufacturer(s) and operator(s).

1.6.6 For the purpose of advancing aviation safety, SRGC, as well as the responses received thereto, sent to ICAO will be posted on the Accident Investigation (AIG) website which is accessible through the ICAO public website.

Appendix 6 to this chapter contains more detailed guidelines on the identification, drafting and follow-up of safety recommendations.

## **1.7 ELECTRONIC LIBRARY OF FINAL REPORTS**

1.7.1 In accordance with the provisions in ICAO Annex 13 and CAR 2011, Part 12, the Executive shall send to ICAO a copy of the Final Report on its investigations into accidents and incidents involving aircraft of a maximum mass of over 5 700 kilograms. Whenever practicable, the Final Report sent to ICAO is to be prepared in one of the working languages of the Organization. Final Reports can be sent in hard copy but preferably in electronic format. The Final Report shall be a public document in the interest of accident prevention.

1.7.2 Final Reports received by ICAO will be stored on the ICAO Electronic Library of Final Reports (e-Library) and posted on the AIG website which is accessible through the ICAO public website at <http://www.icao.int/safety/AirNavigation/AIG/Pages/e-library-of-final-reports.aspx>. In this way, safety lessons learned during investigations and information captured in Final Reports will be made available to a wide audience, including safety investigators, other safety officers and interested parties.

## **1.8 EXCHANGE OF FINAL REPORTS BETWEEN STATES**

1.8.1 Aircraft accident prevention is dependent, in part, on information made available from accident investigations. The causes and/or contributing factors of accidents, especially those in which large aircraft are involved, are of interest to all States and in particular to those States operating similar aircraft types. Therefore, prompt dissemination to all States of the findings of aircraft accident investigations can be a major contribution to aviation safety. To facilitate the exchange of accident information, all States are encouraged to disseminate their Final Reports to other States. Use of the Internet can expedite such dissemination.

1.8.2 ICAO also encourages States to exchange information concerning any safety recommendations that were made before the completion of the Final Report.

1.8.3 The Final Reports of accidents and incidents submitted to ICAO are available in the e-library of Final Reports on the AIG website which is accessible through the ICAO public website. However, some Final Reports may not be available in the e-library, and States that require information pertaining to these Final Reports should request a copy of these Final Reports from the accident investigation authority of the State which conducted the investigation. Appendix 2 to Chapter 4 of Part I of this manual lists the addresses and contact numbers of States' accident and incident investigation authorities as reported to ICAO prior to April 2013. An up-to-date list can be found on the AIG website which is accessible through the ICAO public website.

1.8.4 The final reports released by the Executive can be found in the SACAA website <http://www.caa.co.za/Pages/Accidents%20and%20Incidents/Key-issues.aspx>.

Version: Amendment 1

Effective Date: **01 April 2016**

Latest revision: **01**

Issue Number: **Issue 1**

Document Classification: Restricted

Page 9 of 62



**Manual of Procedure  
Accidents and Incidents Investigation Division**

**1.9 ICAO ADDRESS**

Final Reports being sent to ICAO should be sent using one or both of the following addresses:

By mail: International Civil Aviation Organization  
Attention: AIG Section  
999 University Street  
Montréal, Quebec, Canada H3C 5H7  
By email: [ADREP@icao.int](mailto:ADREP@icao.int)

**Manual of Procedure  
Accidents and Incidents Investigation Division**

## **Appendix 1 to Chapter 1 FORMAT AND CONTENT OF THE FINAL REPORT**

To enable the Final Report to be presented in a convenient and uniform manner, a standardized format is contained in the Appendix to Annex 13 and CAR 2011, Part 12. However, that format may be adapted to the circumstances of the accident or incident. Detailed guidance on completing each section of the Final Report is provided below.

### **INTRODUCTION (TITLE AND SYNOPSIS)**

The title of the Final Report should contain the following information: name of the operator; manufacturer, model, nationality and registration marks of the aircraft; and place and date of the accident.

The introduction should contain brief information on the notification of the accident to national and foreign authorities, the identification of the accident investigation authority conducting the investigation, the accredited representation from other States and brief information on the organization of the investigation. The authority releasing the report, as well as the date of release, should also be given.

The introduction should contain a synopsis which briefly describes the accident. It should provide an overview of the accident flight, a statement of why the accident happened and a brief summary of the injuries and damage. The synopsis could be described in an executive summary to the Final Report and should usually not exceed one page in length.

The title page, or the inside cover, may contain a statement on the accident prevention objective of the investigation and the Final Report. It may also be stated that it is not the purpose of the investigation and the Final Report to apportion blame or liability. For example, the following text may be considered: "In accordance with Annex 13 to the Convention on International Civil Aviation and CAR 2011, Part 12, it is not the purpose of aircraft accident investigation to apportion blame or liability. The sole objective of the investigation and the Final Report is the prevention of accidents and incidents."

The introduction may also contain a statement regarding the responsibility for implementing the safety recommendations. For example, the following text may be considered: "Unless otherwise indicated, recommendations in this report are addressed to the regulatory authorities of the State having responsibility for the matters with which the recommendation is concerned. It is for those authorities to decide what action is taken."

The introduction should contain a reference to the time of day used in the report, and the differential between local time and Coordinated Universal Time (UTC).

A table of contents, a list of abbreviations used in the report and a list of appendices will enhance the readability of the report.

# Manual of Procedure Accidents and Incidents Investigation Division

## 1. FACTUAL INFORMATION

This part of the Final Report is descriptive in character and should be a comprehensive record of the facts and circumstances established in the investigation. When the investigation was conducted by groups, the report should comprise a consolidation of the relevant information from the group reports. Supporting documents, such as photographs, diagrams, relevant parts of flight recorder readouts and technical reports, should be included or appended to the report. However, only those documents, or portions thereof, which are required to support the facts, analysis and conclusions, shall be appended to the Final Report.

The collection of Human Factors information is an integral part of the investigation. Thus, the Human Factors information should be integrated into the appropriate areas of the factual part of the report, rather than being placed under a separate heading. Human Factors information should be presented in a language that is consistent with the presentation of the other factual information.

The factual information part of the Final Report should contain a description of all the events and circumstances directly related to the occurrence. The sequence should begin as far back in time as is necessary to include the significant events which preceded the accident. This part also contains all factual information, i.e. information resulting from direct verification, which is essential for the development of the analysis, conclusions and safety recommendations. The significance of the facts should not be explained in the factual information part. Such discussions should be presented in the analysis part.

### 1.1 History of the flight

1.1.1 The history of the flight describes the significant events which preceded the accident, in chronological order when this is practicable. The information is usually obtained from sources such as flight records, flight data recorders, cockpit voice recorders, air traffic services records and recordings, and witness accounts. The information should be correlated to local time, or UTC if the flight involved more than one time zone. The information presented in this section of the report should be based on established facts. Usually the flight number, the type of operator and operation, the crew briefing and flight planning, the departure point and time of departure, and the point of intended landing will be given, followed by a description of the events leading to the accident, including navigational details and relevant radio communications. It is important to give a description of the flight and the pertinent events as they occurred, including a reconstruction of the significant portion of the flight path, if appropriate. Evidence which facilitated the reconstruction of the sequence of events, such as witness accounts, cockpit voice recorder and air traffic services transcripts, should be mentioned.

1.1.2 In the history of the flight section, the objective is to enable the reader to understand how the accident happened but to avoid any analysis of why the accident occurred.

1.1.3 With regard to the location of the occurrence, include:

- a) the latitude and longitude, as well as a geographical reference to a well-known location (such as 75 km south of XYZ);
- b) the elevation of the accident site;
- c) time of the occurrence in local time (and UTC if the flight crossed time zones); and
- d) whether it was day, dawn, dusk or night.

Version: Amendment 1

Effective Date: **01 April 2016**

Latest revision: **01**

Issue Number: **Issue 1**

Document Classification: Restricted

Page 12 of 62

<b>Manual of Procedure</b> <b>Accidents and Incidents Investigation Division</b>
---

## 1.2 Injuries to persons

1.2.1 Table 1 should be used to summarize injuries to persons. This table should be completed using numbers.

Injuries	Crew	Passengers	Total in Aircraft	Other
Fatal				
Serious				
Minor				Not Applicable
None				Not Applicable
Total				

Table 1. Injuries to persons

1.2.2 Fatal injuries include all deaths determined to be a direct result of injuries sustained in the accident. Serious injury is defined in Chapter 1 of Annex 13 and in CAR 2011, Part 12. For statistical purposes, ICAO and CAR 2011, classifies a fatal injury as an injury which results in death within thirty days of the accident. The heading "Others" in the table refers to persons outside the aircraft who were injured in the accident. When the accident involves a collision between two aircraft, a separate table should be used for each aircraft.

1.2.3 Also, the nationalities of the passengers and the crew should be listed by stating the number of fatalities and serious injuries for each nationality.

## 1.3 Damage to aircraft

This section should contain a brief statement of the damage sustained by the aircraft in the accident (destroyed, substantially damaged, slightly damaged, or no damage). A detailed description of damage to relevant aircraft components and systems should be included in Section 1.12 — Wreckage and impact information. Further guidance for the determination of aircraft damage is provided in Attachment F to Annex 13.

## 1.4 Other damage

Make a brief statement of damage sustained by objects other than the aircraft, such as buildings, vehicles, navigation facilities, aerodrome structures and installations, and any significant damage to the environment.

## 1.5 Personnel information

1.5.1 Provide a brief description of the qualifications, experience and history for each flight crew member (pilot, co-pilot and flight engineer) including age, type and validity of licences and ratings; flying experience (total hours), types flown and hours on the type; hours flown in the last 24 hours, 7 days and 90 days prior to the accident; results of recent training and mandatory and periodic checks; experience on route and aerodrome involved in the accident; relevant information on duty time and rest periods in the 48 hours prior to the accident; significant medical history and medical checks. Also, state the position occupied by each flight crew member and identify who was flying the aircraft.

1.5.2 When relevant to the accident, give a brief statement of the duties and responsibilities of the cabin crew, as well as their qualifications, experience and training. For example, these details would be relevant if the accident involved an evacuation of the aircraft.

**Manual of Procedure  
Accidents and Incidents Investigation Division**

1.5.3 When relevant to the accident, include a brief statement of the validity of licences and ratings, the qualifications and experience of air traffic services personnel, including age, position manned, total experience (in years), and details of experience specific to the position manned. Details of training and pertinent checks should be included, as well as duty times and rest periods in the 48 hours prior to the occurrence.

1.5.4 When relevant to the accident, information on maintenance personnel and other personnel involved should include qualifications, experience, time on duty, shift work rosters, workload and the time of the day.

1.5.5 When relevant to the occurrence, this section would also include information on any personal or medical factors that could have influenced human performance.

1.5.6 Use subheadings, as appropriate, to organize the information in this section.

### **1.6 Aircraft information**

1.6.1 When relevant to the accident, provide a brief statement of the airworthiness and maintenance of the aircraft including the following information:

- a) *General information:* Aircraft manufacturer and model, serial number and year of manufacture; nationality and registration marks, validity of the Certificate of Registration; name of the owner and the operator; and validity of the Certificate of Airworthiness;
- b) *Aircraft history:* Total flying hours since manufacture, since overhaul and since last periodic inspection. Include relevant information on maintenance log and maintenance documentation, compliance (or otherwise) with airworthiness directives, manufacturer service bulletins and aircraft modification status;
- c) *Helicopters:* Main rotor and tail rotor types and serial numbers. When relevant, include total time, time since overhaul, time since inspection, and certificated time and cycle limits for relevant components;
- d) *Engines and propellers:* Engine manufacturer and model, position on the aircraft and engine or engine module serial numbers; engine overhaul period if an engine failure occurred; and total hours, hours since overhaul and hours since last inspection, for each engine. If relevant, provide the same information for the propellers;
- e) *Fuel:* Type of fuel used and type of fuel authorized. Also, state the amount of fuel on board and how it was determined, its specific gravity and its distribution in the fuel tanks;
- f) *Accessories:* In respect of any component which failed, give details of the manufacturer, type, model, part and serial number, certificated time and cycle limits, and operating time since manufacture and since overhaul;
- g) *Defects:* List any technical defects in the aircraft, engine or accessories which were discovered during the investigation or recorded in the appropriate log and not cleared. Indicate whether the defects were recurring and whether the flight was permissible under the aircraft master minimum equipment list. If there were no defects, make a statement to that effect; and
- h) *Aircraft load:* The maximum certificated take-off mass and landing mass, actual take-off mass and mass at the time of the occurrence should be given. Also, state the certificated limits for the centre of gravity of the aircraft, and the centre of gravity at take-off and at the time of the occurrence. Include a description of the operator's loading control system, the load distribution and its security, and how the details of the aircraft mass and centre of gravity were established.

# **Manual of Procedure Accidents and Incidents Investigation Division**

1.6.2 Describe any aircraft part or system which had a bearing on the accident. Similarly, describe operational procedures, performance limitations and other aircraft-related circumstances which played a role in the accident. The objective is to enable the reader to fully understand how the accident happened.

1.6.3 The availability, serviceability and use of transponder, airborne collision avoidance system (ACAS) and traffic alert and collision avoidance system (TCAS), ground proximity warning system (GPWS) and terrain awareness warning system (TAWS) should be stated. The relevant systems should be discussed in detail for near-collisions, mid-air collisions, approach and landing accidents and controlled flight into terrain accidents.

## **1.7 Meteorological information**

1.7.1 Provide a brief statement on the relevant meteorological conditions, including the forecast and actual weather, together with an appreciation of the weather in retrospect. When relevant to the occurrence, the following information should be included:

- a) Describe when, where and how the pilot obtained weather information;
- b) Weather forecast: Route and aerodrome forecasts available to the pilot, and details of any weather briefing obtained by the pilot prior to departure or received en route;
- c) Weather observations at the time and place of the occurrence including precipitation, ceiling, visibility, runway visual range, wind speed and direction, temperature and dew point;
- d) Actual weather on the route of the flight, including weather observations, SIGMETs, pilot reports and witness accounts;
- e) A general view of the weather situation (synoptic weather);
- f) Weather radar recordings, satellite photos, low-level wind shear alert system (LLWSAS) data, and other recorded meteorological information; and
- g) Natural light conditions at the time of the accident, such as day (sunlight or overcast), twilight (dawn or dusk; when relevant, the time of sunrise or sunset at the applicable altitude should be included), night (dark or moonlight) and when relevant, the position of the sun relative to the direction of the flight.

1.7.2 The amount of meteorological information to be included in this section depends on the significance of the meteorological factors in the occurrence. A detailed description of the forecast and weather observations is appropriate for a weather-related occurrence whereas a brief summary of the weather is appropriate when the weather was not a factor.

## **1.8 Aids to navigation**

1.8.1 Include relevant information on navigation and landing aids available, such as global navigation satellite system (GNSS), non-directional radio beacon (NDB), very high frequency omnidirectional radio range (VOR), distance measuring equipment (DME), instrument landing system (ILS), and visual ground aids, as well as their serviceability at the time of the accident.

1.8.2 When relevant, include pertinent information on equipment on board the aircraft, such as auto flight system, flight management system (FMS), global positioning system (GPS), and inertial navigation system (INS), including their serviceability. Relevant maps, charts, approach plates and radar recordings should also be discussed and included in, or attached to, the report.

# Manual of Procedure Accidents and Incidents Investigation Division

## 1.9 Communications

Describe the communication facilities available to the flight crew and their effectiveness. Describe the communications with the air traffic services and other communications relevant to the flight, including reference to communication logs and transcripts of recordings. When essential to the analysis and understanding of the occurrence, pertinent extracts from the transcripts of air traffic services communications recordings should be included in this section or attached to the report.

### 1.10 Aerodrome information

1.10.1 When the occurrence took place during take-off or landing, include information concerning the aerodrome and its facilities. When relevant, include the following information:

- a) Name of aerodrome, location indicator, reference point (latitude/longitude) and elevation;
- b) Runway identification, runway markings, runway length and slope, length of overrun, and obstructions;
- c) Runway conditions, such as pavement texture and grooving, rubber deposits, presence of water, slush, snow, ice, friction coefficient and braking action;
- d) Lighting, such as runway, taxiway and stopway lighting; and visual aids, such as visual approach slope indicator system (VASIS) and precision approach path indicator (PAPI);
- e) Runway inspection programmes and inspections carried out; and
- f) Bird and wildlife programmes.

1.10.2 If the aircraft was taking off from, or landing on, an area other than an aerodrome, relevant information on the take-off or landing area should be given.

1.10.3 This section should be divided into departure aerodrome information and destination aerodrome information, if both aerodromes were pertinent to the occurrence.

### 1.11 Flight recorders

1.11.1 Provide the particulars for each flight recorder, such as manufacturer, model, number of parameters recorded, recording medium and duration of the recording. The recorders would include flight data recorders (FDR), cockpit voice recorders (CVR), quick access recorders, engine parameter recorders, airborne image recorders, data link recorders, non-volatile memory chips in aircraft systems, and other on-board or ground-based recorders.

1.11.2 Describe the condition of the recorders on recovery, in particular their exposure to fire and impact forces. If the flight recorder(s) could not be recovered, the reasons should be explained. If data were not recorded or could not be extracted, describe the reasons for the malfunction or loss of data. Include techniques used to extract data and any problems encountered. If the recorders operated properly, a short statement to this effect should be made and the pertinent data presented.

1.11.3 In this section, provide information recorded by the flight recorders. Because of the length of a flight data recording read-out report, include here or in an appendix to the Final Report only those parts of the read-out reports which are pertinent to the analysis and findings.



## **Manual of Procedure Accidents and Incidents Investigation Division**

1.11.4 Transcripts from the cockpit voice recordings shall be included in the Final Report or its appendices only when essential to the analysis and understanding of the occurrence. Parts of the recordings not essential to the analysis shall not be disclosed. Chapter 5 of Annex 13 and CAR 2011, Part 12 provisions pertinent to transcribed voice recordings and should be taken into account when it is considered necessary to include such transcripts in the Final Report or its appendices.

1.11.5 If the aircraft was not required to be equipped with flight recorders, a statement along the following lines may be used: "The aircraft was not equipped with a flight data recorder or a cockpit voice recorder. Neither recorder was required by the relevant aviation regulations."

1.11.6 When applicable, describe any techniques or processes used to recover data from other devices containing solid-state memory, including methods employed for the extraction (decoding) of operational and/or engineering units from the raw data set.

1.11.7 If the flight recorders installed did not comply with ICAO Standards or national regulations, or if the recorders did not function in accordance with specifications or were not properly maintained, these deficiencies should be noted in this section of the investigation report. When applicable, a statement as to the impact of these deficiencies on the investigation should be noted.

### **1.12 Wreckage and impact information**

1.12.1 Provide a general description of the site of the accident and the distribution pattern of the wreckage, including the final portion of the flight path, the impact path, the impact sequence and the location of impact impressions on the ground, trees, buildings and other objects. The impact heading, aircraft attitude (pitch, roll and yaw) and aircraft configuration at impact should be given. When relevant, the terrain surrounding the site of the accident should be described. Relevant wreckage distribution diagrams, charts and photographs should be included in this section or appended to the report. The location and the state of the major parts of the wreckage should be presented. In case of an in-flight breakup of the aircraft, a detailed description of the wreckage distribution should be provided.

1.12.2 In major accident investigations, it might be necessary to present the examination of the wreckage and the technical investigations under appropriate subheadings in this section, such as structures, power plants, instruments, flight controls and systems. The descriptions under each subheading should embrace the significant facts determined by the group which was responsible for the detailed investigation. Under appropriate subheadings also include the relevant results of special technical investigations, examinations and laboratory tests, and the significance of the results obtained (see also Section 1.16 — Tests and research). When relevant, the technical laboratory and test reports should be appended to the Final Report.

1.12.3 It is important to include all pertinent material failures and component malfunctions and to indicate whether they occurred prior to or at impact. It is essential that failed or malfunctioning components which are deemed to be significant to the accident be described. A detailed description of all wreckage components is not necessary; describe only components considered to be relevant or which required examination and analysis. The inclusion of drawings of components and photographs of specific failures will enhance the Final Report. Such drawings and photographs could be presented together with the appropriate text or as an appendix.

Version: Amendment 1

Latest revision: **01**

Document Classification: Restricted

Effective Date: **01 April 2016**

Issue Number: **Issue 1**

Page 17 of 62

# Manual of Procedure Accidents and Incidents Investigation Division

## 1.13 Medical and pathological information

1.13.1 Describe the results of the medical and pathological investigations of the flight crew. Medical information related to flight crew licences should be included under Section 1.5 — Personnel information. When relevant to the accident, the medical investigation may also concern the cabin crew members, passengers and ground personnel.

1.13.2 The results of the pathological and toxicological examinations concerning injuries, detection of disease and factors which impaired human performance, such as carbon monoxide, oxygen deficiency, alcohol and other drugs, should be stated. If alcohol and drugs are detected, their effects on human performance as determined by medical experts should be presented in this section.

1.13.3 Describe the pathological evidence of significance to the survival investigation such as the relationship of injuries and pathological evidence to the deceleration forces, aircraft attitude at impact, seat design and attachments, seat belts (see also Section 1.15 — Survival aspects), break-up of the aircraft structure, smoke inhalation, decompression and any evidence of preparation for an emergency situation, such as forced landing, ditching and unlawful interference.

1.13.4 Given the provisions of Annex 13, Chapter 5, with regard to medical and private records, particular care should be taken that such information is disclosed in the Final Report only when pertinent to the analysis and conclusions of the accident. In some States, there is a requirement for the investigation authority to coordinate the release of such information with the appropriate authority for the administration of justice.

1.13.5 If the medical examinations indicate that the performance of flight crew members was not degraded, a sentence along the following lines may be used: "There was no evidence that physiological factors or incapacitation affected the performance of flight crew members."

## 1.14 Fire

1.14.1 If a fire or an explosion occurred, give a brief description of whether the fire started in flight or after ground impact. For in-flight fires, describe the effectiveness of the aircraft fire warning systems and the aircraft fire extinguishing systems. The determination of the origin of a fire, source of ignition, fuel source, duration, severity and effects on the aircraft structure and the occupants usually requires an analysis of the facts and indications and should therefore be dealt with in the analysis part of the Final Report. This section should describe the factual information which was established in the investigation related to the fire and which should then be discussed and analysed in the analysis part.

1.14.2 For fires on the ground, describe the propagation and the extent of the fire damage. The response time of the rescue fire service, access to the accident site by the rescue fire service vehicles, the type of fire fighting equipment used, the type of extinguishing agent and the amount that was used and its effectiveness should also be described.

1.14.3 The effect of the fire on the evacuation and survivability of the occupants should be described in Section 1.15 — Survival aspects.

1.14.4 If there was no fire, a sentence along the following lines may be used: "There was no evidence of fire in flight or after the impact."

Version: Amendment 1

Latest revision: 01

Document Classification: Restricted

Effective Date: 01 April 2016

Issue Number: Issue 1

Page 18 of 62

# Manual of Procedure Accidents and Incidents Investigation Division

## 1.15 Survival aspects

1.15.1 Give a brief description of the search and rescue activities. When applicable, include information regarding the serviceability and effectiveness of the emergency locator transmitters.

1.15.2 The location of crew members and passengers in relation to injuries sustained should be stated. The failure of structures such as seats, seat belts and overhead bins should be described. Also, the use and effectiveness of safety equipment should be reported. Aspects pertinent to the crashworthiness of the aircraft should be addressed, as well as occupant survivability in relation to impact forces and fire.

1.15.3 If an evacuation was conducted, a description of the following information is usually included:

- a) first notification of an accident to the emergency services and the response time;
- b) emergency lighting in the aircraft (installation, activation, functioning and failures);
- c) communications;
- d) passenger behaviour and carry-on baggage;
- e) emergency exits (types of exits and their use);
- f) evacuation slides (types of slides, activation and their use);
- g) injuries sustained in the evacuation; and
- h) post-evacuation events.

## 1.16 Tests and research

1.16.1 Describe the results of any tests and research undertaken in connection with the investigation. Flight tests, simulator tests and computer modelling of aircraft performance are examples of the type of information that should be included in this section. Relevant details of research that is used to support the analysis should also be included.

1.16.2 The results of examinations of aircraft and engine parts may alternatively be included in Sections 1.6 — Aircraft information, 1.12 — Wreckage and impact information, or 1.16 — Tests and research.

## 1.17 Organizational and management information

1.17.1 When relevant to the accident, provide pertinent information on any organization and its management whose activities may have directly or indirectly influenced the operation of the aircraft. The organizations to be addressed in this section could include:

- a) operator;
- b) maintenance organizations;
- c) air traffic services;
- d) aerodrome administration;
- e) meteorological services;
- f) aircraft manufacturer;
- g) certification and licensing authority; and
- h) regulatory authority.

1.17.2 When deficiencies in the organizational structure and functions had a bearing on the accident, the information could include, but need not be limited to, the following factors:

- a) safety culture;

# Manual of Procedure Accidents and Incidents Investigation Division

- b) resources and financial viability;
- c) management policies and practices;
- d) internal and external communications; and
- e) certification, safety oversight and regulatory framework.

1.17.3 When relevant, provide pertinent information concerning the operator, such as type and date of issuance of the air operator certificate, types of operations authorized, types and number of aircraft authorized for use, and authorized areas of operation and routes. Also, include information concerning any deficiencies found in the operator's company operations manual and other operator documentation, when the deficiencies had a bearing on the accident.

## 1.18 Additional information

Give relevant information and facts, not already included in Sections 1.1 to 1.17, which are essential to the development of the analysis and conclusions parts of the Final Report.

Ensure that the factual information part of the Final Report contains all the technical data which are essential to the analysis and conclusions parts of the report.

## 1.19 Useful or effective investigation techniques

When useful or effective investigation techniques have been used during the investigation, briefly describe the main features of these techniques and their pertinence to future investigations. However, the data and the results obtained as they relate to the occurrence should be included under the appropriate Sections 1.1 to 1.18 of the investigation report. The full report on the use of these techniques may be included as an appendix to the Final Report.

## 2. ANALYSIS

2.1 In the analysis part of the Final Report, the significance of the relevant facts and circumstances which were presented in the factual information part should be discussed and analysed in order to determine which events contributed to the accident. There might be a necessity to repeat the description of some of the evidence already presented in the factual information part; however, the analysis should not be a restatement of the facts. Also, no new facts should be introduced in the analysis part. The purpose of the analysis is to provide a logical link between the factual information and the conclusions that provide the answer to why the accident occurred.

2.2 The analysis part should contain an evaluation of the evidence presented in the factual information part and should discuss the circumstances and events that existed or may have existed. The reasoning must be logical and may lead to the formulation of hypotheses which are then discussed and tested against the evidence. Any hypothesis which is not supported by the evidence should be eliminated; it is then important to clearly state the reasons why a particular hypothesis was rejected. When a hypothesis is not based on fact but is an expression of opinion, this should be clearly indicated. As well, the justification for sustaining the validity of a hypothesis should be stated and reference should be made to the supporting evidence. Contradictory evidence must be dealt with openly and effectively. Cause related conditions and events should be identified and discussed. The discussion in the analysis should support the findings and the immediate and systemic causes and/or contributing factors of the accident.

2.3 Also, discuss and analyse any issue that came to light during the investigation which was identified as a safety deficiency, although such issue may not have contributed to the accident.

Version: Amendment 1  
Latest revision: **01**  
Document Classification: Restricted

Effective Date: **01 April 2016**  
Issue Number: **Issue 1**

Page 20 of 62

# Manual of Procedure Accidents and Incidents Investigation Division

2.4 Because the Final Report is often drafted as the investigation progresses and several investigators (all the groups in a major investigation) will contribute to the analysis part of the report, the development of an outline and subheadings for the analysis part will ensure that the investigators know their drafting assignments. Such an outline will also indicate to the investigators how the subheadings will come together in forming the analysis part of the Final Report. An example of such an outline is provided in Table 2.

## EXAMPLE OF SUBHEADINGS IN THE ANALYSIS PART

An aircraft impacts the ground short of the runway during an instrument approach in marginal weather. Some of the occupants are killed or injured. Based on these few facts, the investigator-in-charge can identify many of the areas to be investigated and analysed. At an early stage of the investigation, the investigator-in-charge is able to allocate drafting assignments to the investigators for tentative subheadings in the analysis part, as follows:

### 2.1 General

### 2.2 Flight operations

- 2.2.1 Crew qualifications
- 2.2.2 Operational procedures
- 2.2.3 Weather
- 2.2.4 Air traffic control
- 2.2.5 Communications
- 2.2.6 Aids to navigation
- 2.2.7 Aerodrome

### 2.3 Aircraft

- 2.3.1 Aircraft maintenance
- 2.3.2 Aircraft performance
- 2.3.3 Mass and balance
- 2.3.4 Aircraft instrumentation
- 2.3.5 Aircraft systems

### 2.4 Human Factors

- 2.4.1 Psychological and physiological factors affecting the personnel involved

### 2.5 Survivability

- 2.5.1 Rescue fire service response
- 2.5.2 Analysis of injuries and fatalities
- 2.5.3 Survival aspects

The tentative subheadings in the analysis part may require adjustments as the investigation progresses, but the list identifies the major areas that should be covered in the analysis. The list is a good starting point as it indicates to the

investigators where each drafting assignment for the subheadings will fit into the analysis part as a whole.

Table 2. Example outline for the analysis part

Version: Amendment 1  
Latest revision: **01**  
Document Classification: Restricted

Effective Date: **01 April 2016**  
Issue Number: **Issue 1**

Page 21 of 62

**Manual of Procedure  
Accidents and Incidents Investigation Division**

### 3. CONCLUSIONS

This part should list the findings and the causes and/or contributing factors established in the investigation. The conclusions are drawn from the analysis. However, it is essential to maintain the same degree of certainty in a conclusion as was established in the analysis. For example, if the discussion in the analysis indicates that an event or circumstance was likely, then the finding should contain the same qualifier (likely).

#### 3.1 Findings

3.1.1 The findings are statements of all significant conditions, events or circumstances in the accident sequence. The findings are significant steps in the accident sequence, but they are not always causal or indicate deficiencies. Some findings point out the conditions that pre-existed the accident sequence, but they are usually essential to the understanding of the occurrence. The findings should be listed in a logical sequence, usually in a chronological order.

3.1.2 All findings must be supported by and directly related to the factual information and the analysis. No new factual information should be introduced in the findings.

3.1.3 It is customary to report on certain conditions in every investigation, such as the validity of licences, the training and experience of the flight crew members, the airworthiness and maintenance of the aircraft, the loading of the aircraft, and whether there was a pre-impact failure. The following findings are typical of what is usually included:

- a) The flight crew members were licensed and qualified for the flight in accordance with existing regulations;
- b) The maintenance records indicated that the aircraft was equipped and maintained in accordance with existing regulations and approved procedures;
- c) The mass and centre of gravity of the aircraft were within the prescribed limits; and
- d) There was no evidence of airframe failure or system malfunction prior to the accident.

3.1.4 Significant events and factors that were investigated in detail, but eliminated in the analysis, should also be stated in the findings. For example, findings such as “flight crew fatigue was not a factor in the accident” and “there was no malfunction of the elevator control system” should be considered when a comprehensive investigation was made into these aspects. Areas of ambiguity should be identified and stated, for example, “the investigation was unable to establish whether the pilot-in-command or the co-pilot was the pilot flying the aircraft at the time of the accident”.

3.1.5 Some States present the causes and/or contributing factors of the accident separately from the findings under their own heading. Other States indicate in the list of findings which of the findings were causes and which were contributing factors of the accident, for example by adding after such a finding “(causal factor)” or “(contributory factor)”.

3.1.6 Examples of findings commonly used in accident reports are listed in Appendix 5 to Chapter 1.

#### 3.2 Causes/contributing factors

3.2.1 Causes are those events which alone, or in combination with others, resulted in injuries or damage. Causes are defined as actions, omissions, events, conditions, or a combination thereof, which led to the accident or incident. The identification of causes does not imply the assignment of fault or the determination of administrative, civil or criminal liability.

3.2.2 Contributing factors are actions, omissions, events, conditions, or a combination thereof, which, if eliminated, avoided or absent, would have reduced the probability of the accident or incident occurring, or mitigated the severity of

Version: Amendment 1

Effective Date: **01 April 2016**

Latest revision: **01**

Issue Number: **Issue 1**

Document Classification: Restricted

Page 22 of 62

**Manual of Procedure  
Accidents and Incidents Investigation Division**

the consequences of the accident or incident. The identification of contributing factors does not imply the assignment of fault or the determination of administrative, civil or criminal liability.

3.2.3 The determination of causes and/or contributing factors should be based on a thorough, impartial and nonobjective analysis of all the available evidence. Any condition, act or circumstance that was a causal factor in the accident should be clearly identified. Seen together, the causes should present a picture of all the reasons why the accident occurred. The list of causes should include both the immediate causes and the deeper or systemic causes. No new information should be introduced in the causes. The causes and/or contributing factors should be presented in a logical order, usually chronological order, bearing in mind that it is essential that all the causes and/or contributing factors be presented. The causes and/or contributing factors should be formulated with preventive action in mind and linked to appropriate safety actions.

3.2.4 The Director list the causes and/or contributing factors, usually sequentially as they occurred, without attempting to prioritize the causes/contributing factors. Other States prioritize the causes/contributing factors by using terms such as primary causes and contributing causes.

3.2.5 When certain of a cause, a definite statement should be used; if reasonably sure of a cause, a qualifying word such as “probable” or “likely” should be used. The causes statement is usually a reiteration of statements made at or near the end of the analysis and in the findings. For example, if the analysis and the findings state that a cause related event or circumstance was “probable”, then the causes statement should contain the same qualifier (probable).

3.2.6 When there is insufficient evidence to establish why an accident or an incident occurred, there should be no hesitation in stating that the causes remain undetermined. In many instances, the most likely scenario could be stated provided that a qualifier, such as “likely” or “probable” is included. However, a list of possible causes should not be given.

3.2.7 The causes/contributing factors should be formulated in a way which, as much as practicable, minimizes the implication of blame or liability. Nevertheless, the accident investigation authority should not refrain from reporting a cause merely because blame or liability might be inferred from the statement of that cause. An example of a formulation of the causes/contributing factors is given in Table 3.

#### **4. SAFETY RECOMMENDATIONS**

4.1 In accordance with Annex 13 and CAR 2011, Part 12, the sole objective of the investigation of an occurrence shall be the prevention of accidents and incidents. One very important tool to achieve this objective is the issuance of timely safety recommendations. A safety recommendation is defined as a proposal of AIID. The intended purpose of a safety recommendation is the prevention of accidents or incidents and the reduction of the consequences of such occurrences. It, in no case, has the purpose of creating a presumption of blame or liability for an accident or incident.

4.2 Annex 13 and CAR 2011, Part 12 further states that the State conducting the investigation, at any stage of the investigation of an accident or incident, shall recommend in a dated transmittal correspondence to the appropriate authorities, including those in other States, any preventive action that it considers necessary to be taken promptly to enhance aviation safety.



**Manual of Procedure  
 Accidents and Incidents Investigation Division**

**EXAMPLE OF FORMULATION OF CAUSES/CONTRIBUTING FACTORS**

One Accident — Same Causes/Contributing Factors:

The causes/contributing factors of this accident were:

- the failure of airport management to identify and correct poor runway drainage;
- the failure of the air traffic controllers to inform the flight crew that there was standing water on the runway;
- the flight crew's mismanagement of the aircraft's Vref; airspeed; and
- the flight crew's mismanagement of thrust reversers.

The causes/contributing factors of this accident were:

- the known and uncorrected lack of runway drainage;
- lack of communication between the ATC and the flight crew regarding the degenerated runway condition;
- the aircraft crossing the threshold 16 knots above and
- the late application of reverse thrust.

The statements to the left implicate three groups of persons — the flight crew, the airport management and the air traffic controllers. Since the formulation of causes and/or contributing factors should not be blamesetting in nature, the statements should focus on functions that in the example case were not performed at the level required for safe operation. Such a functional statement logically leads to corrective or preventive measures that should be recommended to prevent future accidents.

Table 3. Example of causal statements

4.3 The safety recommendations section of the Final Report should contain the following: any safety recommendations made during the investigation; the preventive actions taken in response to these recommendations by the appropriate authorities and the industry; and the safety recommendations issued as part of the investigation Final Report. Publishing the preventive actions taken in the Final Report has significant accident prevention value for those involved in similar operations. Some States also include information regarding the acceptance and implementation of their recommendations in this section of the investigation report.

4.4 Accident investigations often reveal safety issues that did not contribute to the occurrence but which nevertheless are safety deficiencies. These safety deficiencies should be addressed in the Final Report. Some States include safety recommendations not related to the causes and/or contributing factors of the occurrence in the safety recommendations part of the Final Report; other States have adopted means other than the Final Report to notify the appropriate authorities of safety deficiencies that are not related to the occurrence. The actions taken in response to these types of safety communications are usually included in the Final Report.

4.5 In order to ensure that appropriate action is taken, each safety recommendation should be issued to a specific addressee. This is usually the appropriate authority of the State that has the responsibility for the matters with which the safety recommendation is concerned.

4.6 The documentation supporting a safety recommendation should clearly describe the safety problem and provide justification for the recommended safety actions. The development of convincing recommendations must be based on validated factual information, sound analysis and logical conclusions so as to withstand challenges by those having divergent interests.

Version: Amendment 1

Effective Date: **01 April 2016**

Latest revision: **01**

Issue Number: **Issue 1**

Document Classification: Restricted

Page 24 of 62



# **Manual of Procedure Accidents and Incidents Investigation Division**

4.7 Consideration should be given to whether a safety recommendation should prescribe a specific solution to a problem or whether the recommendation should be flexible enough to allow the addressee latitude in determining how the objective of the recommendation can be achieved. This latter approach might be used for situations wherein all the salient facts are not available; wherein more research, examination and testing appears necessary; or, wherein the accident investigation authority may lack the detailed information and experience required to evaluate the financial, operational and policy impacts of a specific solution.

4.8 Preferably, a safety recommendation should be performance-based and should identify the safety objectives of the recommendation, in particular mitigating the risks underlying the recommendation. This approach to recommendations will also facilitate the evaluation, by both the safety investigation authority and the addressee of the recommendation, as to whether and to what degree the action taken or planned will mitigate the deficiency upon which the recommendation was made.

4.9 Both safety recommendations issued during the course of the investigation and safety recommendations made in Final Reports shall be sent in a dated transmittal correspondence to the appropriate authorities, notifying them of the safety recommendations for which they are responsible, and formally requesting the responsible authority to notify the authority making the recommendation, within 90 days, as to the preventive action taken or under consideration, the action taken if it differs from the action that was recommended, or the reasons why no action will be taken.

4.10 The Executive is required to inform the Accident Investigation Section of the ICAO Air Navigation Bureau of SRGCs issued, as well as the responses received to these recommendations.

Chapter 1, Section 1.6, of this manual contains more information on SRGCs.

4.11 In summary, the safety recommendations should include a convincing presentation of the safety problem with the attendant safety risks deriving from it, as well as a recommended course of action for the responsible authority to take in order to eliminate the unsafe condition. The safety recommendations should identify what action is required but should leave considerable scope for the implementing authority to determine how the problem will be resolved. Appendix 6 to this chapter contains more detailed guidelines on the identification, drafting and follow-up of safety recommendations.

## **5. APPENDICES**

The appendices should include, as appropriate, any pertinent information considered necessary to understand the report, such as a glossary, supporting technical reports, accident site diagrams, photographs and flight recorder data. Graphics and diagrams should have a professional appearance and should show only the information required for understanding the report. The appendices should be numbered and listed in the table of contents. The following is a list of appendices commonly found in a Final Report:

- a) communications transcripts;
- b) flight data recorder readouts;
- c) flight plan and load sheet;
- d) technical investigation reports;
- e) pertinent pages from manuals and handbooks;
- g) maps and diagrams; and
- h) photographs.

-END-

Version: Amendment 1  
Latest revision: **01**  
Document Classification: Restricted

Effective Date: **01 April 2016**  
Issue Number: **Issue 1**  
Page 25 of 62

**Manual of Procedure  
Accidents and Incidents Investigation Division**

## **Appendix 2 to Chapter 1 REPORT-WRITING CONVENTIONS**

### **1. GENERAL GUIDELINES**

The purpose of writing any report is to convey the facts of the subject of the report to its readers in a succinct, clear, unambiguous and well-organized manner. When drafting the Final Report, the writer should not assume that everyone who reads the report is familiar with the technical details. Therefore, information should not be omitted because it is obvious to the writer. The writer should remember that the readers have not visited the accident site nor have they participated in the investigation. The writer's responsibility is to present the reader with a word picture of the accident and the investigation. The writer should assume that the reader is intelligent but uninformed and will analyse the facts presented in order to test the conclusions of the Final Report. For example, if it is obvious to the writer that the weather was not a factor in the accident, this should be clearly stated; nevertheless the reader should be provided with enough weather information to substantiate the conclusion.

### **2. EDITORIAL STANDARDS**

#### **2.1 Convey an attitude of impartiality and write objectively**

2.1.1 The report should not favour any party involved with the accident, e.g. the pilot, the operator, the aircraft manufacturer or special interest groups, such as advocates for noise abatement, nor should it reflect prejudice against any party.

2.1.2 The straightforward descriptive narrative which avoids flowery descriptions and human interest items should be used. Clues to the investigator's personality or prejudices should not be apparent to the reader. The indiscriminate use of adjectives and adverbs is usually not acceptable in accident report writing.

2.1.3 The writer should write to express the facts, not to impress the reader. If the Final Report must delve into complicated areas such as aerodynamics, metallurgy, and the operation of aircraft systems, the subject should be explained in a way that is easy to understand. To maintain the readability of the body of the Final Report, complex subjects may be explained in an appendix to the Final Report.

2.1.4 Subjects of equal importance should be given equal coverage when describing the facts, conditions and circumstances.

#### **2.2 Clarity**

2.2.1 The use of an outline, such as that provided in the Appendix to Annex 13, is a common sense approach to the task of writing the Final Report.

2.2.2 Clarity in report writing can be enhanced by reporting sequentially. The *History of the Flight*, for example, should describe the flight in a logical sequence from start to finish. Placing events out of sequence tends to confuse the reader.

# **Manual of Procedure Accidents and Incidents Investigation Division**

2.2.3 Each sentence should be a logical unit. The writer should keep the subject of the sentence and its verb close together. Long asides between the subject and the verb interrupt the flow of the sentence. The information should be organized logically within each section and grouped under an appropriate heading.

2.2.4 The writer should provide the reader with a lead-in and context for new information or ideas by first referring to any related information already presented.

2.2.5 Pronouns, especially “this”, “that” and “it” should be placed close to their antecedents to ensure clarity. A pronoun should refer to a specific antecedent rather than an implied antecedent.

2.2.6 Sentences should begin with the real subject of the sentence, rather than with subjects such as “It is ...” or “There are ...”.

2.2.7 The writer should select the words that best describe the situation. Vague terminology should be avoided, for example, “Damage to the aircraft *appeared* to be the result of impact loading” and “It was *presumed* that the aircraft started to cartwheel after striking the left wing tip”. Words such as *appeared*, *seemed* and *presumed* are not precise enough for the factual part of the report. The investigator must report evidence found and not that which *appeared*, *seemed* or was *presumed* to have been.

2.2.8 The findings and statements in the report must be unambiguous and subject to only one interpretation.

## **2.3 Conciseness**

2.3.1 Long sentences might make it difficult for the reader to comprehend the point the writer is trying to make. This does not mean that the report should consist entirely of simple sentences. Long sentences are acceptable if understandable. Any sentence which must be re-read to be understood is too long.

2.3.2 The writer should avoid unnecessary repetition and extraneous and irrelevant data, which might confuse the reader and may cloud the reader’s comprehension of the conclusions.

## **2.4 Consistency**

The writer should verify that the terminology used is consistent throughout the report. The writer should use the same terms for the same things and should spell, hyphenate and abbreviate words consistently. When using abbreviations, the writer should spell out the words in full followed by the short form in parentheses the first time they are used. Thereafter, the abbreviations should be used. All the abbreviations used should be included in a glossary.

## **2.5 Gender**

Avoid gender stereotyping, such as referring to the investigator-in-charge or an engineer by using the pronoun “he”.

## **3. ACTIVE VERSUS PASSIVE VOICE**

3.1 The choice of voice has a great effect on the force of the narrative. The active voice is more vigorous and less ambiguous than the passive. Use of the passive voice often leads to wordiness, fuzziness and sometimes grammatical

Version: Amendment 1

Latest revision: **01**

Document Classification: Restricted

Effective Date: **01 April 2016**

Issue Number: **Issue 1**

Page 27 of 62

## **Manual of Procedure Accidents and Incidents Investigation Division**

errors. In most cases, the active voice is preferable. For example, “When the pilot detected a fuel leak ...” is preferable to “When a fuel leak was detected by the pilot ...”.

3.2 The passive voice is more appropriate in some cases, such as:

- a) when the agent, or doer of the act, is unknown;
- b) when a reference to the actor is inappropriate; and
- c) when the agent is less important than the action, e.g. “The two survivors were rescued ...”.

3.3 The writer should recognize when each voice is appropriate and not overuse the passive voice.

#### **4. READ AND REVISE**

4.1 Revising is a part of writing. Few investigators can express clearly on the first attempt what they intend to convey. One means of improving clarity is through the write – read, re-write – re-read process. The writer should review what he/she has written and check if it needs further clarification, shortening, rearrangement or other changes. Experienced writers find advantage in setting the report aside for a day or more before making a critical review to ensure that it conveys the intended meaning. Soliciting comments from other investigators often pinpoints ambiguous areas of the report in which the writer should make improvements. Comments from other investigators should be accepted as constructive and not as personal criticism.

4.2 The writer should edit the report to ensure that it is logical and consistent. Some of the common traps in drafting a report are:

- a) *Hasty generalization*: basing a conclusion on too few instances, e.g. “Three of the ten witnesses agreed that the pilot was flying too low”;
- b) *Using absolute words such as “always” or “never”*: such words are seldom appropriate, e.g. “Mid-air collisions are always the result of pilot inattention”;
- c) *Oversimplification*: linking two events as if one caused the other when the relationship between them is more complex, e.g. “This practice violated fundamental flying principles”;
- d) *Asserted conclusion*: drawing conclusions from insufficient data, e.g. “Based on wide experience, the experts concluded that landing accidents are the result of unstable approaches”;
- e) *Post hoc fallacy*: assuming that because one event follows another, the second event was caused by the first, e.g. “Inexperienced pilots are more susceptible to CFIT accidents”;
- f) *Either/or fallacy*: assuming that a complicated question has only two possible answers, e.g. “The choice was to fly the mission in accordance with the company directives or not to fly it at all”;
- g) *Non sequitur*: drawing a conclusion that bears no logical relation to the facts presented, e.g. “Because of his position as Director of Flight Operations, he was fully qualified to assess the qualifications of his pilots”; and
- h) *False analogy*: suggesting that because two things or situations share some similarities, they must be alike in other ways, e.g. “Flying an aircraft at night is no different to flying it during the day in IMC”.

Version: Amendment 1

Latest revision: 01

Document Classification: Restricted

Effective Date: 01 April 2016

Issue Number: Issue 1

Page 28 of 62

# Manual of Procedure Accidents and Incidents Investigation Division

## 5. TONE OF EXPRESSION

### 5.1 Blame or liability

5.1.1 Annex 13 and CAR 2011, Part 12 states that it is not the purpose of the investigation to apportion blame or liability. Nevertheless, blame or liability might sometimes be inferred from the findings. When such is the case, it is essential that all the causes and/or contributing factors established be clearly presented in the report. To do otherwise would jeopardize the objective of the investigation, which is the prevention of accidents and incidents.

5.1.2 Avoid words or phrases that have connotations of blame. For instance, use the statement “The operator *did not* notify ...” rather than “The operator *failed* to notify ...”. An investigator should not write from the perspective of a regulator who is concerned about non-compliance with rules and regulations or from the perspective of a manager in a company, where determination of support for disciplinary or legal action may be an objective.

### 5.2 Contravention of regulations and orders

5.2.1 Deviations from the accepted norms of compliance with regulations and procedures should be clearly identified when relevant to the accident. The nature of the regulation and the extent of the deviation should be described in sufficient detail in order to explain the safety implications of the deviation. The analysis should explain the reasons why the deviation created a hazard.

5.2.2 For a contravention to be included as a cause and/or contributing factor, it should be clear that complying with the regulation or procedure could have prevented the accident or lessened the consequences of the accident.

### 5.3 Human suffering

The writer must recognize the human suffering that is associated with an accident by using respectful and discreet language in the report. If sensitive information must be reported because it pertains to the causes and/or contributing factors or safety deficiencies, it should be reported with due sensitivity.

## 6. COMMONLY USED LANGUAGE

Many accident investigation authorities employ standardized phraseology for the details which are recorded in any Final Report on an accident, such as crew qualifications and aircraft serviceability. Refer to Appendix 5 to Chapter 1 — Commonly used findings.

## 7. GLOSSARY

A glossary should be appended to the Final Report. Only the abbreviations used in the report should appear in the glossary.

-END-

**Manual of Procedure  
 Accidents and Incidents Investigation Division**

**Appendix 3 to Chapter 1  
 SYMBOLS AND ABBREVIATIONS**

**1. INTRODUCTION**

1.1 This appendix presents a list of symbols and abbreviations which might be used in a Final Report. Note that symbols which are comprised of letters are presented among the abbreviations.

1.2 When compiling a glossary of abbreviations for an accident report, include only those abbreviations used in the report.

**2. SYMBOLS**

- ° Degree (examples °C (temperature) and 1° (angle))
- % Per cent (example 95% fan speed (N1))
- ' Minute
- " Second

**3. ABBREVIATIONS**

**A**

- AC Alternating current /Advisory circular
- ACARS Aircraft communications addressing and reporting system
- ACAS Airborne collision avoidance system
- ACC Area control centre
- AD Airworthiness directive
- ADF Automatic direction-finder
- ADI Attitude direction indicator
- ADIZ Air defence identification zone
- ADS Automatic dependent surveillance
- AFCS Automatic flight control system
- AFIS Aerodrome flight information service
- AFTN Aeronautical fixed telecommunication network
- AGL Above ground level
- AIC Aeronautical information circular
- AIP Aeronautical information publication
- AIREP Air-report
- AMSL Above mean sea level
- ANO Air navigation order
- AOA Angle of attack
- AOC Air operator certificate
- AOM Aircraft operating manual
- APP Approach control office/Approach control/Approach control service
- APU Auxiliary power-unit
- ARTCC Air route traffic control centre

Version: Amendment 1  
 Latest revision: **01**  
 Document Classification: Restricted

Effective Date: **01 April 2016**  
 Issue Number: **Issue 1**  
 Page 30 of 62

**Manual of Procedure  
 Accidents and Incidents Investigation Division**

ASI	Airspeed indicator
ASR	Airport surveillance radar, also "air safety report"
ASRS	Aviation safety reporting system
ATC	Air traffic control
ATCC	Air traffic control centre
ATFM	Air traffic flow management
ATIS	Automatic terminal information service
ATPL	Airline transport pilot licence
ATS	Air traffic services
AVASIS	Abbreviated visual approach slope indicator system
B	
C	
C	Degrees Celsius (Centigrade)
	Centre (runway identification)
CAA	Civil aviation authority
	Civil aviation administration
CADC	Central air data computer
CAM	Cockpit area microphone
CAS	Calibrated airspeed
CAT	Clear air turbulence/Category
CAVOK	Visibility, cloud and present weather better than prescribed values and conditions (cloud and visibility OK)
CFIT	Controlled flight into terrain
CG	Centre of gravity
cm	Centimetre(s)
C of A	Certificate of airworthiness
CPL	Commercial pilot licence
CRM	Crew resource management
CRT	Cathode-ray tube
CTA	Control area
CVR	Cockpit voice recorder
D	
DA	Decision altitude
DA/H	Decision altitude/height
DC	Direct current
DFDR	Digital flight data recorder
DH	Decision height
DME	Distance measuring equipment

**Manual of Procedure  
 Accidents and Incidents Investigation Division**

**E**

E	East/Eastern longitude
EAS	Equivalent airspeed
ECAM	Electronic centralized aircraft monitor
EFIS	Electronic flight instrument system
EGPWS	Enhanced ground proximity warning system
EGT	Exhaust gas temperature
EICAS	Engine indication and crew alerting system
ELT	Emergency locator transmitter
EMI	Electromagnetic interference
EPR	Engine pressure ratio
ETA	Estimated time of arrival/Estimating arrival
ETD	Estimated time of departure/Estimating departure

**F**

FAF	Final approach fix
FAP	Final approach point
FAR	Federal Aviation Regulations
FCOM	Flight crew operating manual
FD	Flight director
FDAU	Flight data acquisition unit
FDM	Flight deck management
FDR	Flight data recorder
FIR	Flight information region
FIS	Flight information service
FL	Flight level
FMC	Flight management computer
FMS	Flight management system
FOD	Foreign object damage (also the object)
FSS	Flight service station
ft	Foot (feet)
ft/min	Feet per minute

**G**

g	Normal acceleration
GNSS	Global navigation satellite system
GPS	Global positioning system
GPWS	Ground proximity warning system

**H**

h	Hour(s)
HF	High frequency (3 000 to 30 000 kHz)



Department /Division: **Accidents and Incidents Investigation Division**Document **Executive Manager: Accidents and Incidents Investigation Division**

Name of Document::

**Manual of Procedure  
Accidents and Incidents Investigation Division**

Hg	Mercury
hPa	Hectopascal
HSI	Horizontal situation indicator
HUD	Head-up display
Hz	Hertz (cycle per second)
I	
IAF	Initial approach fix
IAS	Indicated airspeed
IFR	Instrument flight rules
IIC	Investigator-in-charge
ILS	Instrument landing system
IMC	Instrument meteorological conditions
INS	Inertial navigation system
IRS	Inertial reference system
ISA	International standard atmosphere
J	
JAR	Joint Aviation Requirements
K	
kg	Kilogram(s)
kHz	Kilohertz
km	Kilometre(s)
km/h	Kilometres per hour
kN	Kilonewton
kt	Knot(s)
L	
L	Litre(s)
LDA	Left (runway identification)
LDA	Landing distance available
LED	Light emitting diode
LF	Low frequency (30 to 300 kHz)
LLWS	Low-level wind shear
LOFT	Line-oriented flight training
LORAN	Long range air navigation system
M	
m	Metre(s)
M	Mach number

Version: Amendment 1  
 Latest revision: **01**  
 Document Classification: Restricted

Effective Date: **01 April 2016**  
 Issue Number: **Issue 1**  
 Page 33 of 62

Department /Division: **Accidents and Incidents Investigation Division**Document **Executive Manager: Accidents and Incidents Investigation Division**

Name of Document::

**Manual of Procedure  
Accidents and Incidents Investigation Division**

MAC	Mean aerodynamic cord
MDA	Minimum descent altitude
MDA/H	Minimum descent altitude/height
MDH	Minimum descent height
MEL	Minimum equipment list
MET	Meteorological/Meteorology/Meteorological services
MHz	Megahertz
min	Minute(s)
MLS	Microwave landing system
mm	Millimetre(s)
MMEL	Master minimum equipment list
MOC	Minimum obstacle clearance (required)
MOPS	Minimum operational performance standards
MSA	Minimum sector altitude
MSL	Mean sea level
$\mu$ [mu]	Coefficient of sliding friction
<b>N</b>	
N	North/Northern latitude/Newton
N <sub>1</sub>	Low pressure compressor speed (two-stage compressor); fan speed (three-stage compressor)
N <sub>2</sub>	High pressure compressor speed (two-stage compressor); intermediate pressure compressor speed (three-stage compressor)
N <sub>3</sub>	High pressure compressor speed (three-stage compressor)
NDB	Non-directional radio beacon
NDT	Non-destructive testing
NOTAM	Notice to airmen (a notice distributed by means of telecommunication containing information concerning the establishment, condition or change in any aeronautical facility, service, procedure or hazard, the timely knowledge of which is essential to personnel concerned with flight operations)
NM	Nautical mile(s)
<b>O</b>	
OAT	Outside air temperature
OCA	Obstacle clearance altitude
OCH	Obstacle clearance height
OCL	Obstacle clearance limit
OCS	Obstacle clearance surface
OPS	Operations
<b>P</b>	
PA	Public address system
PANS	Procedures for Air Navigation Services

Version: Amendment 1

Effective Date: **01 April 2016**Latest revision: **01**Issue Number: **Issue 1**

Document Classification: Restricted

Page 34 of 62

<p><b>Manual of Procedure</b>  <b>Accidents and Incidents Investigation Division</b></p>
--

PAPI	Precision approach path indicator
PAR	Precision approach radar
PCU	Power control unit
PIC	Pilot-in-command
PIREP	Pilot report
P/N	Part number
<b>Q</b>	
QA	Quality assurance
QAR	Quick access recorder
QFE	Atmospheric pressure at aerodrome elevation (or at runway threshold) (pressure setting to indicate height above aerodrome)
QNH	Altimeter sub-scale setting to obtain elevation when on the ground (pressure setting to indicate elevation above mean sea level)
<b>R</b>	
RA	Radio altimeter/Resolution advisory
RCC	Rescue coordination centre
RESA	Runway end safety area
RF	Radio frequency
RFFS	Rescue and fire fighting service
RMI	Radiomagnetic indicator
RNAV	Area navigation
RPM	Revolutions per minute
RTF	Radiotelephony
RVR	Runway visual range
<b>S</b>	
s	Second(s)
S	South/Southern latitude
SAR	Search and rescue
SAS	Stability augmentation system
SB	Service bulletin
SCAS	Stability and control augmentation system
SDR	Service difficulty report
SEM	Scanning electron microscope
SI	International system of units
SID	Standard instrument departure
SIGMET	Significant meteorological information (information concerning specified en-route weather phenomena which may affect the safety of aircraft operations)
SL	Service letter
SMC	Surface movement control
SMR	Surface movement radar
S/N	Serial number

Department /Division: **Accidents and Incidents Investigation Division**Document **Executive Manager: Accidents and Incidents Investigation Division**

Name of Document::

**Manual of Procedure  
Accidents and Incidents Investigation Division**

SPECI	Aerodrome special weather report
SRA	Surveillance radar approach
SSR	Secondary surveillance radar
STAR	Standard instrument arrival
STOL	Short take-off and landing
SVR	Slant visual range
T	
t	Tonne
TAF	Terminal aerodrome forecast
TAR	Terminal area surveillance radar
TAS	True airspeed
TAWS	Terrain awareness and warning system
TCAS	Traffic alert and collision avoidance system
TCH	Threshold crossing height
TDP	Take-off decision point
TDZ	Touchdown zone
TMA	Terminal control area
TODA	Take-off distance available
TORA	Take-off run available
TRACON	Terminal radar approach control
TWR	Aerodrome control tower/Aerodrome control
U	
UAC	Upper area control centre
UAR	Upper air route
UHF	Ultra-high frequency (300 to 3 000 MHz)
ULB	Underwater locator beacon
UTC	Coordinated Universal Time
V	
VASIS	Visual approach slope indicator system
VFR	Visual flight rules
VHF	Very high frequency (30 to 300 MHz)
VMC	Visual meteorological conditions
VOR	VHF omnidirectional radio range
VSI	Vertical speed indicator
VTOL	Vertical take-off and landing
V	SPEEDS
V <sub>1</sub>	Decision speed
V <sub>2</sub>	Take-off safety speed
V <sub>MCA</sub>	Minimum control speed in the air
V <sub>MCL</sub>	Minimum control speed during landing approach with all engines operating

Version: Amendment 1

Effective Date: **01 April 2016**Latest revision: **01**Issue Number: **Issue 1**

Document Classification: Restricted

Page 36 of 62



**Manual of Procedure  
Accidents and Incidents Investigation Division**

V <sub>MO</sub> /M <sub>MO</sub>	Maximum permissible operating speed or maximum permissible operating Mach number
V <sub>NE</sub>	Never exceed airspeed
V <sub>R</sub>	Rotation speed
V <sub>REF</sub>	Reference landing approach speed, all engines operating
V <sub>S</sub>	Minimum calibrated speed in flight during normal stall manoeuvre
V <sub>S1</sub>	Stalling speed ("clean" configuration)
W	
W	West Western longitude
X	
Y	
Z	

-END-

**Manual of Procedure  
Accidents and Incidents Investigation Division**

**Appendix 4 to Chapter 1  
AVIATION TERMINOLOGY**

**INTRODUCTION**

This appendix comprises two sections. The first section is titled descriptive technical terms and lists technical terms which have a specific meaning and an explanatory definition. The second section presents some commonly used Human Factors terms.

**1. DESCRIPTIVE TECHNICAL TERMS**

**Arcing.** Visible effects (burn spots, fused metal) of an electrical discharge between two electrical connections. Also: flash over.

**Battered.** Damaged by repeated blows or impacts.

**Bent.** Deviated from original line or plane usually caused by lateral force. Also: creased, folded, kinked.

**Binding.** Restricting movement, such as tightened or sticking condition, may result from high or low temperature or a foreign object jammed in mechanism. Also: sticking, tight.

**Bowed.** Curved or gradually deviated from original line or plane often caused by lateral force or heat.

**Brinelling.** Circular surface indenting of bearing races, usually caused by repeated shock loading of the bearing. False brinelling is wear caused by bearing rollers sliding back and forth across a stationary race, while true brinelling is plastic displacement of material.

**Broken.** Separated by force into two or more pieces. Also: fractured.

**Bulged.** Swollen outward locally. Usually caused by excessive local heating or differential pressure. Also: ballooned, swelling.

**Burned.** Oxidized destructively. Usually caused by higher temperature than the parent material can withstand.

**Burrs.** A rough edge or a sharp projection on the edge or surface of the parent material.

**Carboned.** Covered by an accumulation of carbon deposits. Also: carbon-covered, carbon-tracked, coked.

**Chaffed.** Worn by frictional damage. Usually caused by two parts rubbing together with limited motion.

**Checked.** Cracked on the surface. Usually caused by heat.

**Chipped.** Broken away at the edge, corner or surface of the parent material. Usually caused by heavy impact; not flaking.

Version: Amendment 1

Latest revision: 01

Document Classification: Restricted

Effective Date: 01 April 2016

Issue Number: Issue 1

Page 38 of 62

## Manual of Procedure Accidents and Incidents Investigation Division

**Collapsed.** Inwardly deformed original contour of a part. Usually due to high pressure differentials.

**Corroded.** Gradually destroyed by chemical action. Often evidenced by oxide build-up on the surface of the parent material. Also: rusted, oxidized.

**Crack.** Visible partial separation of material.

**Crossed.** Damaged parent material of parts due to improper assembly (as in the case of crossed threads) or parts rendered inoperative (as in the case of crossed wires).

**Curl.** A condition where the tip(s) of compressor or turbine blades have been curled over due to rubbing against engine casings.

**Dented.** Damage by impact of a foreign object resulting in a surface indentation with rounded bottom. Parent material is displaced, but seldom separated. Also: peened.

**Deposits.** A build-up of material on a part either from foreign material or from another part not in direct contact. Also: metalizing.

**Disintegrated.** Separated or decomposed into fragments. Excessive degree of fracturing (breaking) as with disintegrated bearings. Complete loss of original form. Also: shattered.

**Distortion.** Extensive deformation of the original contour of a part usually due to impact of a foreign object, structural stress, excessive localized heating or any combination of these. Also: buckled, depressed, twisted, warped.

**Eccentricity.** Part(s) wherein the intended common centre is displaced. Also: non-concentric.

**Electrical circuits — grounded.** Circuits in which the current has a path to ground.

**Electrical circuits — open.** Incomplete electrical circuit due to separation at or between electrical connections.

**Electrical circuits — shorted.** Circuits in which the current has an undesired path between leads or circuits that are normally at different electrical potentials.

**Eroded.** Component from which material has been carried away by flow of fluids or gases; may be accelerated by heat or grit.

**Fatigue.** The progressive failure of a part under repeated loading.

**Flattened out.** Permanent loss of curvature beyond tolerance limits. Usually caused by compression.

**Frayed.** Worn into shreds by rubbing action.

**Fretting.** Removal of material by rubbing.

**Fusing.** Joining together of two materials. Usually caused by heat, friction or electrical current flow.

Version: Amendment 1

Effective Date: 01 April 2016

Latest revision: 01

Issue Number: Issue 1

Document Classification: Restricted

Page 39 of 62

## **Manual of Procedure Accidents and Incidents Investigation Division**

**Galling.** Chafing or severe fretting caused by relative movement of two surfaces under high contact pressure.

**Glazing.** Undesirable development of a hard, glossy surface due to rubbing action, heat or varnish.

**Gouging.** Scooping out of material usually caused by a foreign object. Also: furrowed.

**Groove(s).** Smooth, rounded furrow or furrows of wear, usually wider than scoring, with rounded corners and a smooth groove bottom.

**Hot-spot.** Result of subjection to excessive temperature usually evidenced by change in colour and appearance of part. Also: heat discoloured, overheated.

**Melted.** Deformed from the original configuration due to heat, friction or pressure.

**Mismatch.** Improper association of two or more parts.

**Mis-positioned.** Improperly installed part which may damage the installed part or two associated parts. Also: , reversed.

**Nick.** A sharp surface indentation caused by impact of a foreign object. Parent material is displaced, seldom separated.

**Out-of-round.** Part with inconsistent diameter.

**Out-of-square.** Part with deformation of right angle relationship between part surfaces.

**Peeling.** A breaking away of surface finishes such as coatings and plating. Peeling would be flaking of large pieces. A blistered condition usually precedes or accompanies peeling. Also: blistered, flaked.

**Pick-up.** A transfer of metal from one surface to another. Usually the result of rubbing two surfaces together without sufficient lubrication.

**Pit.** A small irregular-shaped cavity in the surface of the parent material usually caused by corrosion, chipping or electrical discharge.

**Plugged.** Totally or partially blocked pipe, hoses, tubing, channelling or internal passages. Also: clogged, obstructed, restricted.

**Porous.** State of material caused by internal voids. Usually applied to cast material or welds.

**Rolling-over.** Lipping or rounding of a metal edge. Also: lipped, turned.

**Rubbed.** Moved with pressure or friction against another part.

**Rupturing.** Excessive breaking apart of material usually caused by high stresses, differential pressure, locally applied force or any combination of these. Also: blown, burst, split.

**Score(s).** A deep scratch or scratches made by sharp edges of foreign matter.

Version: Amendment 1

Latest revision: 01

Document Classification: Restricted

Effective Date: 01 April 2016

Issue Number: Issue 1

Page 40 of 62



# Manual of Procedure Accidents and Incidents Investigation Division

**Scratches.** Light, narrow, shallow mark or marks caused by movement of a sharp object or particle across a surface. Material is displaced, not removed.

**Seized.** Parts bound together. May be due to expansion or contraction due to high or low temperature, foreign object jammed in mechanism or lack of lubricant. Also: frozen, jammed, stuck.

**Sheared.** Body divided by cutting action. Also: cut.

**Spalled.** Sharply roughened area characterized by progressive chipping-away of surface material. Not to be confused with flaking.

**Stretching.** Enlargement of a part. May result from exposure to operating conditions or excessive force. Also: growth.

**Stripping.** A condition usually associated with fastener threads or electrical insulation. Involves removal of material by force.

**Torn.** Separated by pulling apart.

**Worn.** Consumption of material of a part as a result of use.

## 2. HUMAN FACTORS TERMS

This section presents a selection of Human Factors terms which are likely to be encountered when writing the Final Report on an accident. Knowledge of these terms will facilitate the identification and formulation of the Human Factors aspects which were present in the accident.

**Acute fatigue.** The result of excessive physical and/or mental activity during a short period. A temporary condition that may be reversed by adequate rest.

**Channelized attention.** A mental state which exists when a person's full attention is focused on one stimulus to the exclusion of all others. This becomes a problem when the person fails to perform a task or process information of a higher priority and thus fails to notice or has no time to respond to cues requiring immediate attention.

**Chronic fatigue.** The result of long exposure to successive periods of acute fatigue, over many days or weeks, without adequate rest periods for recovery.

**Cockpit authority gradient.** The relative skills and experience in a particular environment that are factors in determining the extent of the pilot's authority.

**Cognitive saturation.** The information to be processed exceeds an individual's span of attention.

**Complacency.** A state of reduced conscious attention caused by a sense of security and self-confidence. Behaviour

## Manual of Procedure Accidents and Incidents Investigation Division

characteristics of complacency include overconfidence and boredom, both of which can significantly degrade performance.

**Confirmation bias.** An expectation of an event may diminish an individual's ability to recognize evidence that events are not developing as anticipated.

**Distraction.** The interruption and redirection of attention by environmental cues or mental processes.

**Fascination.** An attention anomaly in which a person observes environmental cues, but fails to respond to them.

**Fatigue.** The progressive decrease in performance due to prolonged or extreme mental or physical activity, sleep deprivation, disrupted diurnal cycles, or life-event stress.

**Habit pattern interference.** Behaviour in which the subject reverts to previously learned response patterns which are inappropriate to the task at hand.

**Illusion.** An erroneous perception of reality due to limitations of sensory receptors and/or the manner in which the information is presented or interpreted.

**Inattention.** Inattention is usually due to a sense of security, self-confidence or perceived absence of threat. Boredom is a form of inattention due to an uninteresting and undemanding environment. Complacency is another form due to an attitude of overconfidence, laxity or lack of motivation.

**Pressure.** A type of stress resulting from the demands of management, peers, self-induced goals, time, environmental factors or man-machine relationship.

**Situational awareness.** The ability to keep track of the prioritized significant events and conditions in the environment of the subject.

**Spatial disorientation.** Unrecognized, incorrect orientation in space.

**Stress.** Mental or physical demand requiring some action or adjustment.

**Vigilance.** Maintenance of the appropriate level of conscious attention for the assigned task. Lapses in attention may occur after a person has been at a monitoring task for a period of time.

-END-

**Manual of Procedure  
Accidents and Incidents Investigation Division**

## **Appendix 5 to Chapter 1 COMMONLY USED FINDINGS**

The following findings might be used in aviation accident reports and are presented here as examples only. The investigator-in-charge must ensure that each finding in an accident report is pertinent, valid and in the proper context.

### **1. AIRCRAFT**

- a) The aircraft was certified, equipped and maintained in accordance with existing regulations and approved procedures.
- b) The aircraft had a valid Certificate of Airworthiness and had been maintained in compliance with the regulations.
- c) The maintenance records indicated that the aircraft was equipped and maintained in accordance with existing regulations and approved procedures.
- d) The aircraft was airworthy when dispatched for the flight.
- e) The mass and the centre of gravity of the aircraft were within the prescribed limits.
- f) There was no evidence of any defect or malfunction in the aircraft that could have contributed to the accident.
- g) There was no evidence of airframe failure or system malfunction prior to the accident.
- h) The aircraft was structurally intact prior to impact.
- i) All control surfaces were accounted for, and all damage to the aircraft was attributable to the severe impact forces.
- j) The aircraft was destroyed by impact forces and a post-impact fire.
- k) Due to the destruction of the aircraft by the impact and fire, it could not be determined whether any preimpact failure or system malfunction contributed to this accident.
- l) The destruction of the aircraft by impact and fire precluded determination of any material failure or system malfunction.
- m) The position of the fuel selectors could not be determined due to the extensive fire damage.
- n) The fuel sampled was of the proper grade and quality and contained no contamination.
- o) The fuel that remained in the aircraft fuel tanks was uncontaminated and of the recommended grade.
- p) The engine(s) stopped from fuel exhaustion (no usable fuel on board).
- q) The engine(s) stopped from fuel starvation (usable fuel on board).
- r) The intercom system, flight deck lighting and other standby electrical services failed some four minutes before impact as a result of a rapid decay in battery power for which no explanation was found.
- s) The obsolescent design of the aircraft's primary flight instruments and radio navigation systems contributed to the loss of situational awareness of the crew at a time of high crew workload.
- t) The worn condition of the left tire reduced braking effectiveness in the wet runway conditions.
- u) Propeller blade damage and twist was consistent with the engine producing power at impact.
- v) The propeller(s) exhibited chord-wise scratching and torsional damage indicative of the engine producing power at impact.

### **2. CREW/PILOT**

- a) The flight crew/pilot/co-pilot was licensed and qualified for the flight in accordance with existing regulations.
- b) The flight crew/pilot/co-pilot was properly licensed, medically fit and adequately rested to operate the flight.
- c) The flight crew/pilot/co-pilot was in compliance with the flight and duty time regulations.
- d) Although the aircraft was equipped for instrument flight, the pilot was not qualified for IFR flight.
- e) The pilot's degraded performance was consistent with the effects of fatigue, but there was insufficient evidence to determine if the pilot's degraded performance contributed to the accident.

Version: Amendment 1  
Latest revision: **01**  
Document Classification: Restricted

Effective Date: **01 April 2016**  
Issue Number: **Issue 1**  
Page 43 of 62

# **Manual of Procedure Accidents and Incidents Investigation Division**

- f) Although the pre-flight rest period was adequate and the flight duty time was within the company flight time limitations, the two-hour turnaround in the middle of the night may have reduced the alertness levels of the two pilots.
- g) The pilot's actions and statements indicated that his/her knowledge and understanding of the aircraft systems was adequate/inadequate.

### **3. FLIGHT OPERATIONS**

- a) The flight was conducted in accordance with the procedures in the company Operations Manual.
- b) The flight crew carried out normal radio communications with the relevant ATC units.
- c) The pilot attempted to continue visual flight in instrument meteorological conditions.
- d) There was insufficient height available to effect a recovery from the stall.
- e) During (phase of flight), the aircraft began an uncommanded turn to the right/left.
- f) During flare for touchdown, the pilot lost control of the aircraft in a strong gust of wind.
- g) The aircraft was fitted with a radio altimeter, but the operator's procedures did not require reference to it during non-precision approaches.
- h) The wind conditions in which the pilot landed the aircraft were outside the limits detailed in the Flight Manual and the Operations Manual.
- i) Braking performance analysis indicated that, in the conditions existing at the time of the accident, the aircraft could not have stopped on the runway available.
- j) The incorrect handling of the airframe de-icing system resulted in a considerable accretion of ice or snow during the descent.
- k) The continuation of the landing with the airspeed above the calculated threshold speed resulted in touchdown beyond the normal touchdown point.
- l) The pilot made an early decision to divert towards a suitable aerodrome while attempting to determine the extent of the emergency.

### **4. OPERATOR**

- a) The presentation of the operator's Emergency Checklist was inadequate for use under conditions of stress.
- b) The Standard Operating Procedure for the non-handling pilot to monitor the progress of the approach was not effective in preventing the pilot flying the aircraft from descending below the published approach profile.
- c) The operator's Quality Assurance system had not identified frequent deviations from the requirements of the Aircraft Maintenance Manual over a considerable period of time.
- d) The crew resource management training arranged by the operator did not promote good flight deck communication.

### **5. AIR TRAFFIC SERVICES AND AIRPORT FACILITIES**

- a) The approach/approach radar controllers were properly licensed, medically fit and correctly rated to provide the service.
- b) The number of air traffic controllers on duty in the tower was (not) in accordance with the regulations.
- c) The air traffic controller's workload was assessed as low/moderate/high with normal complexity.
- d) The air traffic controller gave conflicting clearances to the two aircraft.
- e) The air traffic controller issued a clearance to ... (flt #) which caused a loss of separation to another aircraft (flt #).
- f) The air traffic controller requested (flt #) to (turn, climb, descend) immediately to avoid traffic.
- g) ATC provided prompt and effective assistance to the flight crew.

# Manual of Procedure Accidents and Incidents Investigation Division

- h) Use of incorrect RTF terminology by the flight crew when declaring the emergency negated an effective response from ATC.
- i) All aerodrome approach aids and lighting facilities were operating normally at the time of the accident.
- j) The airport was not equipped with a facility to record the secondary surveillance radar. The lack of data significantly impaired the reconstruction of the aircraft's descent profiles, given the limited information available from the FDR fitted to the aircraft.

## 6. FLIGHT RECORDERS

- a) The aircraft was not equipped with a flight data recorder (FDR) or a cockpit voice recorder (CVR); neither was required by regulation.
- b) The 30-minute closed-loop cockpit voice recorder tape was of inadequate duration to be helpful in the investigation of this accident.
- c) The lack of a CVR recording covering the period of the incident prevented some details of the events from being resolved.

## 7. MEDICAL

- a) There was no evidence that incapacitation or physiological factors affected the flight crew performance.
- b) There was no evidence that the pilot suffered any sudden illness or incapacity which might have affected his/her ability to control the aircraft.
- c) Toxicological tests for common drugs/carbon monoxide/hydrogen cyanide were negative/positive.
- d) Based on the autopsy, toxicology and medical reports, there was no evidence to indicate that the pilot's performance was degraded by physiological factors.
- e) A post-mortem examination of the pilot showed that the cause of death was a coronary atherosclerosis/ hypertensive heart disease. Toxicological results were negative for carbon monoxide, cyanide, volatiles and tested drugs.
- f) The flight crew was diagnosed as suffering from carbon monoxide (CO) exposure.
- g) A toxicology report revealed 0.180 per cent alcohol in the pilot's blood. The specimen was taken one hour and twelve minutes after the accident.

## 8. SURVIVABILITY

- a) The accident was not survivable due to the magnitude of the deceleration forces and the severity of the post-impact fire.
- b) The occupants succumbed to the effects of the post-impact fire.
- c) Although a shoulder harness was available, the pilot did not wear it.
- d) The fatal injuries sustained by the occupants might have been prevented had they worn shoulder harnesses.

## 9. SAFETY OVERSIGHT

- a) The civil aviation authority's safety oversight of the operator's procedures and operations was adequate/ inadequate.
- b) The civil aviation authority's safety oversight programme had not addressed the subject of the diverse nature of the operator's fleet of aircraft, in terms of the primary flight instruments, navigation equipment, flight deck layout and its suitability for public transport operations.



Department /Division: **Accidents and Incidents Investigation Division**

Document **Executive Manager: Accidents and Incidents Investigation Division**

Name of Document::

**Manual of Procedure  
Accidents and Incidents Investigation Division**

- c) The safety oversight programme conducted by the civil aviation authority on this operator had identified deficiencies in the crew resource management aspects of the company's operations. However, the oversight programme was ineffective in producing sufficient and timely improvement.
- d) The civil aviation authority's monitoring system had been ineffective in identifying and making the operator correct the procedural lapses.

-END-

Version: Amendment 1  
Latest revision: 01  
Document Classification: Restricted

Effective Date: 01 April 2016  
Issue Number: Issue 1  
Page 46 of 62

**Manual of Procedure  
Accidents and Incidents Investigation Division**

**Appendix 6 to Chapter 1  
GUIDELINES ON THE IDENTIFICATION, DRAFTING  
AND FOLLOW-UP OF SAFETY RECOMMENDATIONS**

**Table of Contents**

**1. Principles of safety communication**

1.1 General

**2. Validation of a safety issue/deficiency**

2.1 General

**3. Safety recommendation addressees**

3.1 Safety recommendation action addressees

3.2 Safety recommendation information addressees

**4. Writing safety recommendations**

4.1 Framework of a safety recommendation

4.2 Covering letter for safety recommendations

4.3 Distribution of safety recommendations

**5. Measuring the success of the recommendations**

5.1 General

5.2 Mandating responses to safety recommendations

5.3 Monitoring the progress of action taken

5.4 Assessing responses and action taken

5.5 Follow-up to less-than-adequate action taken/planned

**6. Additional guidance on safety recommendations**

6.1 Qualities of a good safety recommendation

6.2 Characteristics of a weak recommendation

**7. Examples of recommendations**

**1. PRINCIPLES OF SAFETY COMMUNICATION**

**1.1 General**

1.1.1 The purpose of accident and incident investigations is to advance safety by identifying safety issues, deficiencies and underlying/contributing factors that pose a risk to future operations. The State conducting the investigation, at any stage of the investigation of an accident or incident, shall recommend any preventive action that it considers necessary to be taken promptly to enhance aviation safety.

Version: Amendment 1

Latest revision: 01

Document Classification: Restricted

Effective Date: 01 April 2016

Issue Number: Issue 1

Page 47 of 62

# Manual of Procedure Accidents and Incidents Investigation Division

1.1.2 The purpose of safety communication is to ensure that identified risks are communicated to those entities or organizations best able to effect change and to convince them to take remedial safety action. Safety communication can be formal, semi-formal or informal and may take many forms, such as investigation team discussions, briefings, written interim statements and safety advisories, and formal safety recommendations. The form and timing of safety communication is influenced by the degree of risk associated with the underlying safety issue.

1.1.3 The openness of Annex 13 investigations and the involvement of stakeholders in the investigation process should encourage the involved organizations/stakeholders to take action before a recommendation is made. In fact, some investigation authorities view having to resort to formal recommendations as being a failure of less formal communications to produce change.

1.1.4 The failure to take immediate actions may be an indicator that the involved organizations/stakeholders are not convinced that action is required or that the changes required are, or are viewed to be, very difficult to achieve. Therefore, the investigation authority's recommendations must be close to perfect to achieve positive results.

1.1.5 A formal safety recommendation would be the appropriate type of safety communication for safety issues/deficiencies assessed as posing a high risk to the conduct of air operations.

1.1.6 The remainder of this document will concentrate on guidelines on the identification, drafting and follow-up of safety recommendations.

## 2. VALIDATION OF A SAFETY ISSUE/DEFICIENCY

### 2.1 General

2.1.1 The following are steps that would assist in determining the requirement and bases for a safety recommendation:

- a) Using the information determined by the investigation, determine the history of the flight of the aircraft and the pre-flight, in-flight and post-flight events that contributed to the adverse consequences related to the occurrence;<sup>1</sup>
- b) From the list of events, determine the safety significant events. Safety significant events would include but not be limited to events:
  - that are undesirable from a risk perspective;
  - that are potentially linked as an antecedent to another undesirable event;
  - that are non-standard or unusual; or
  - where one or more alternative actions or options are available;
- c) For the safety significant event of interest, determine the underlying factors that contributed to or facilitated the event;
- d) For the underlying factor of interest, determine the level of risk. Risk can be defined in terms of two components: the probability that the underlying factor will lead to an adverse consequence and the severity of that adverse consequence;<sup>2</sup>
- e) For the underlying factor of interest, determine the availability and the effectiveness of physical or administrative defences needed to limit, reduce or prevent unwanted consequences;

1. An event describes a happening or an action step in a sequence of actions that lead to or could lead to an occurrence.

2. ICAO *Safety Management Manual* (Doc 9859) provides guidance on the risk assessment process.



**Manual of Procedure  
Accidents and Incidents Investigation Division**

f) For the underlying factor of interest, validate the safety deficiency. This validation is based on the results of risk analysis and defence analysis above. A safety deficiency is an underlying factor with risks for which the defences are less than adequate;

g) For each safety deficiency, determine possible risk-control options that have the potential to mitigate the risk of the safety deficiency contributing to a future occurrence. Each risk-control option must be critically evaluated to determine the benefits that would result from the control option, the administrative and financial feasibility and the reasonableness of the control option; and

h) Based on the preceding analyses, determine the risk-control option that has the best potential for mitigating the risk associated with the validated safety deficiency.

2.1.2 In summary, a safety recommendation would be warranted if the analysis of the investigation information determines the existence of an underlying factor(s) with high risks and for which the defences are less than adequate. A safety recommendation would be issued at any time during the investigation whenever it is assessed that there is an immediate risk to the conduct of air operations and an urgent need for immediate formal communications with the action addressee responsible for the matter. A safety recommendation would be made in the Final Report of the investigation in situations wherein immediate action is not needed, or wherein the deficiency is not clearly defined and justified until the Final Report stage. See Figure 1 for a flow diagram of the steps to determine the requirement and bases for a safety recommendation.

### **3. SAFETY RECOMMENDATION ADDRESSEES**

#### **3.1 Safety recommendation action addressees**

3.1.1 Safety recommendations must be communicated to the entity or organization that is best able to take action to mitigate the risks, has the authority and responsibility to take remedial action and has the mandate to take action that will have the broadest impact.

Version: Amendment 1

Latest revision: **01**

Document Classification: Restricted

Effective Date: **01 April 2016**

Issue Number: **Issue 1**

Page 49 of 62

**Manual of Procedure**  
**Accidents and Incidents Investigation Division**

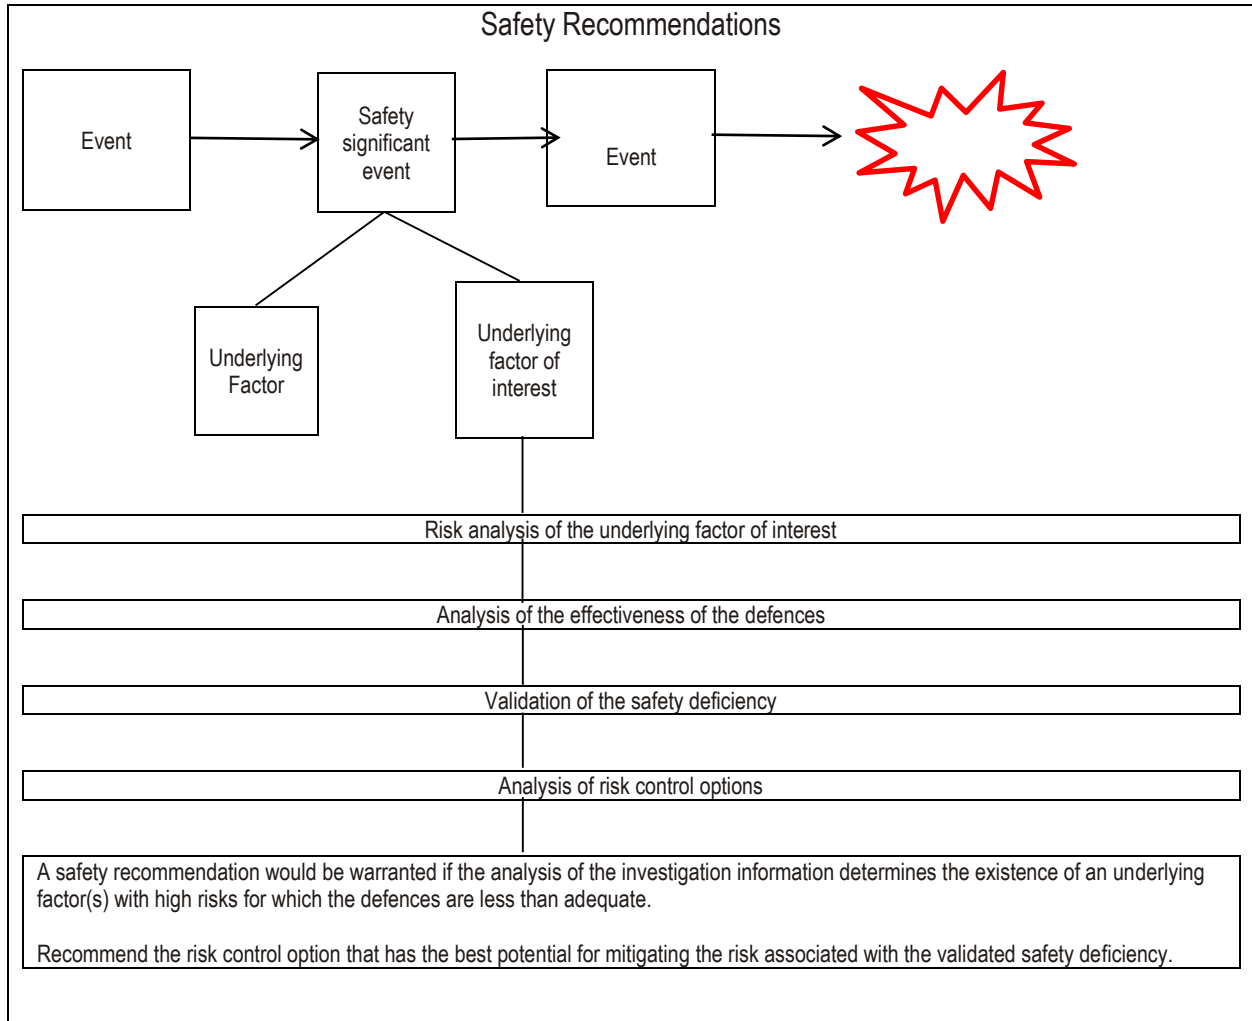


Figure 1. Steps to determine the requirement and bases for a safety recommendation

**Manual of Procedure  
 Accidents and Incidents Investigation Division**

3.1.2 There should only be one principal action addressee for each recommendation. Having multiple addressees will result in a situation where there could be uncertainty as to what addressee is responsible for taking safety action. Having multiple principal action addressees also will make it difficult to track and evaluate action taken in response to the recommendation. In such situations, it would be preferable to send the recommendation independently to each addressee. Alternatively, one addressee could be designated as the lead action addressee and the other addressees designated as support action addressees.

3.1.3 For SRGCs, the action addressee normally would be the State civil aviation authority responsible for the certification and oversight, in part, of the design, manufacture, maintenance and/or operations of the aircraft or facilities involved in the occurrence. For other safety recommendations, the action addressee could be, but not be limited to, the air operator, manufacturer, maintenance organization, air traffic services provider and airport operator. ICAO would be the action addressee for recommendations related to the international Standards and Recommended Practices contained in the Annexes to the Convention on International Civil Aviation and perceived deficiencies in ICAO guidance material.

**3.2 Safety recommendation information addressees**

For the purpose of advancing the safety of operations, copies of the safety recommendation also should be sent to those persons or organizations of the aviation community that have a direct interest in the safety issue or who would benefit from the information that was the basis for the safety recommendation. Information addressees could be but not limited to the following: involved government departments; involved States and accident investigation authorities; and involved stakeholders, such as the airline, maintenance organization, manufacturer, air traffic services provider, and airport operator.

**4. WRITING SAFETY RECOMMENDATIONS**

**4.1 Framework of a safety recommendation**

To be effective, a safety recommendation must present a compelling argument for safety action to mitigate the risks identified by the investigation. A clear, succinct and well-structured safety communication would facilitate this objective. The following is a suggested framework for a safety recommendation, including guidelines as to the type of information that should be included:

- a) The background section should include the following:
  - A summary of the occurrence, including the date, aircraft type and location of the occurrence. This summary should describe what happened, not why it happened. This section should also identify the investigation authority, the investigation number and the status of the investigation;
  - The safety significant event associated with the safety issue, along with the adverse consequence(s) that resulted from the associated unsafe condition;
  - The associated safety deficiency(ies), if any; and
  - Immediate circumstances that led to the adverse consequence.
- b) The supporting information section should include the following:
  - Historical evidence of the risks and consequences, by referring to other occurrences where similar circumstances resulted in adverse consequences, to demonstrate that this was not just an isolated occurrence;
  - Information as to how the number of such accidents has varied over time, by geographic area, by aircraft type and by type of operation. This section should also include a description of the adverse

## **Manual of Procedure Accidents and Incidents Investigation Division**

consequences associated with the occurrences. This information establishes the probability of adverse consequences, and the severity of the consequences in terms of historical evidence; and

— The risk control options currently in use and the effectiveness of these options, if applicable.

c) Deficiency analysis section should include the following:

— The unsafe condition/factor underlying the safety significant event;

— The shortcomings of prior actions taken, if any;

— The inadequacies of existing defences; and

— The residual risk.

d) Safety recommendation section should include the following:

— A summary of the safety deficiency statement, including the unsafe condition, inadequacies of defences, and the residual risk (of adverse consequences) if no action is taken; and

— The recommended safety action (risk-control options), including the performance expectations.

e) Attachments supporting the integrity of the factual information and argument for change could be appended to the recommendation document, such as, but not limited to, statistics, lists of similar previous occurrences, technical and scientific analyses, and flight data recorder printouts and analyses.

*Note.— For safety recommendations issued in Final Reports, the above information should be included in the factual information, analysis, conclusions, recommendations and attachments sections of the Final Report.*

### **4.2 Covering letter for safety recommendations**

The covering letter for the safety recommendation should include the following information:

a) The specific addressee for a safety recommendation should be the head official of the organization who is best suited to implement the required safety action. This could be, but not be limited to, the following: the government minister, director general, secretary general or chief executive officer;

b) The safety recommendation letter must be dated;

c) Occurrence summary (see framework section);

d) Purpose of the safety recommendation;

e) Safety deficiency statement;

f) Recommended safety action(s); and

g) Requirement to respond within 90 days regarding:

— Actions taken;

— Actions planned including alternative actions, if applicable; or

— Reasons why no action will be taken.

For safety recommendations issued in the Final Report, a separate cover letter should be sent to each head official deemed responsible for taking action on a safety recommendation.

### **4.3 Distribution of safety recommendations**

4.3.1 Copies of the safety recommendation should be sent to persons or organizations in the aviation community that have a direct interest in the safety issue which was the basis for the safety recommendation, as well as to other members of the aviation community who would benefit from the information, including but not limited to, the following:

a) The safety recommendation action addressee;

b) Involved government departments;

c) Involved States and accident investigation authorities;

Version: Amendment 1

Effective Date: **01 April 2016**

Latest revision: **01**

Issue Number: **Issue 1**

Document Classification: Restricted

Page 52 of 62

**Manual of Procedure  
Accidents and Incidents Investigation Division**

- d) Involved stakeholders, such as, but not limited to, the airline, maintenance organization, manufacturer, air traffic services provider and airport operator; and
- e) Others who may benefit from lessons learned.

4.3.2 The ICAO Accident Investigation Section should be provided with a copy of each SRGC.

4.3.3 Some accident investigation authorities post their safety recommendations on a website.

## **5. MEASURING THE SUCCESS OF THE RECOMMENDATIONS**

### **5.1 General**

The purpose of a safety recommendation is to ensure that identified risks are communicated to those entities or organizations best able to effect change and to convince them to take remedial safety action. In this regard, the issuance of safety recommendations by the investigation authority can be viewed as the most important output of the investigation. The full potential of recommendations to prevent future accidents and incidents cannot be realized until appropriate safety action to mitigate the risks underlying the recommendation is taken by the entity to which the recommendation was issued. Measuring the effectiveness of safety recommendations to achieve positive changes requires an evaluation of the actions taken against the performance expectations of the safety recommendation. Refer to Figure 2 for a flow diagram for tracking safety recommendations.

### **5.2 Mandating responses to safety recommendations**

5.2.1 ICAO Annex 13 requires that a State that receives safety recommendations shall inform the proposing State, within 90 days of the date of the dated transmittal correspondence, of the preventive action taken or under consideration, or the reasons why no action will be taken. In most States, the State civil aviation authority is responsible for ensuring compliance with this Standard; in other States the State accident investigation authority is the entity responsible.

5.2.2 Some accident investigation authorities post the responses to safety recommendations on a website.

**Manual of Procedure**  
**Accidents and Incidents Investigation Division**

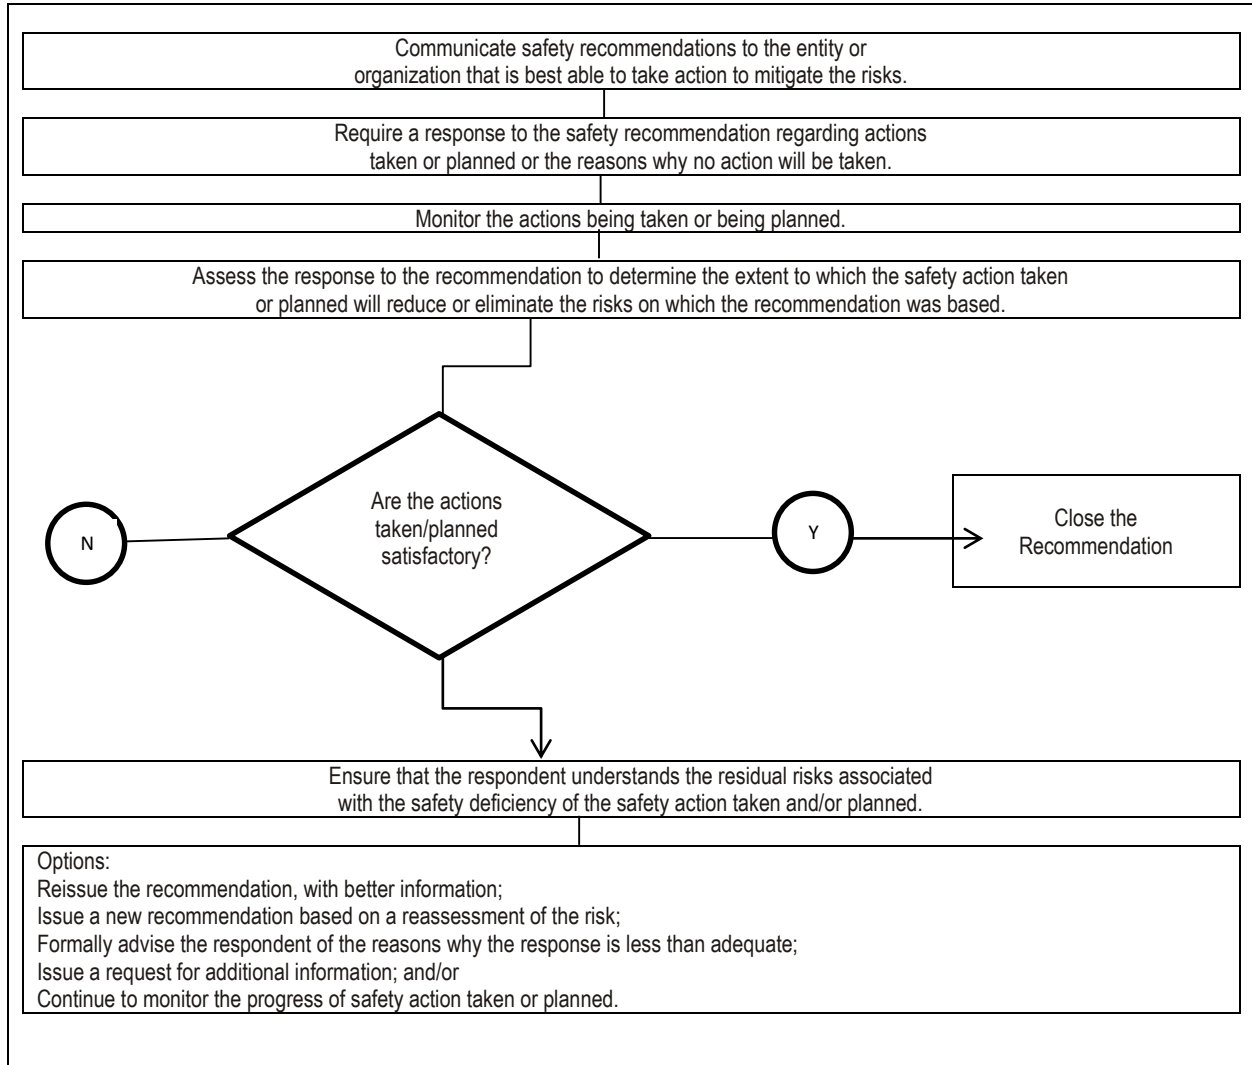


Figure 2. Flow diagram for tracking safety recommendations

# Manual of Procedure Accidents and Incidents Investigation Division

## 5.3 Monitoring the progress of action taken

5.3.1 Annex 13 and CAR 2011 requires that the Regulators that receives a safety recommendation should implement procedures to monitor the progress of the action taken in response to that safety recommendation. ICAO Annex 13 also recommends that a State conducting the investigation, or any other State issuing a safety recommendation, should implement procedures to record the responses to the safety recommendation issued.

5.3.2 Notwithstanding the Annex 13 provisions, it would be prudent for the accident investigation authority that issued the safety recommendation to establish a direct staff-level liaison with the accident investigation authority of the State responsible for responding to the recommendation in order to arrange for routine updates as to the status of the action taken and/or action planned.

5.3.3 For situations where a response is not received within the prescribed 90 days, the director shall formally request a status report from the action addressee to which the safety recommendation was made.

5.3.4 Some accident investigation authorities post the responses to recommendations on a website.

## 5.4 Assessing responses and action taken

5.4.1 It would be prudent for the accident investigation authority that issued the recommendation to have a process and guidelines for assessing responses to recommendations. The purpose of evaluating the safety action taken and/or planned is simply to determine whether further safety action is required.

5.4.2 The following is a suggested process for assessing responses to recommendations:

- a) Review the recommendation to confirm the performance expectations of the recommendation;
- b) Review the response to the recommendation to determine the extent to which the addressee has accepted the existence of the safety deficiency underlying the recommendation;
- c) Assess the extent to which the safety action taken or planned will reduce or eliminate the risks on which the recommendation is based;
- d) Reassess the residual risks associated with the safety deficiency, taking into account the safety action taken and/or planned; and
- e) Categorize the response in terms of risk mitigation.

5.4.3 Some accident investigation authorities assign category of risk mitigation to the responses to safety recommendations, such as “satisfactory”, “partly satisfactory” or “unsatisfactory”. Some accident investigation authorities post the category of risk mitigation on a website.

5.4.4 Some accident investigation authorities assign a status to each recommendation, such as “open” or “closed”. Some accident investigation authorities post the status of their recommendations on a website.

5.4.5 Some accident investigation authorities inform the State responding to a recommendation, in writing, of their assessment of the response. Some accident investigation authorities post the assessments of the responses to their recommendations on a website.

# **Manual of Procedure Accidents and Incidents Investigation Division**

5.4.6 For each SRGC, the Director should provide the ICAO Accident Investigation Section with a copy of the responses to its recommendation, the State's assigned category of risk mitigation of the action taken, and the status of the recommendation.

## **5.5 Follow-up to less-than-adequate action taken/planned**

5.5.1 If it is assessed that a response to a safety recommendation is less than adequate, it would be prudent for the investigation authority to contact the authority responsible for taking action on the recommendation to ensure that:

- a) the recipient of the recommendation understands the recommendation and the risk level associated with the safety deficiency;
- b) the accident investigation authority that issued the recommendation understands the substance of the response to the recommendation, including the potential of the action taken and/or action planned to mitigate risk; and
- c) the recipient of the recommendation understands the residual risks associated with the safety deficiency, taking into account the safety action taken and/or planned.

5.5.2 The follow-up options to a less-than-adequate response would vary based on the level of residual risk and the urgency for additional safety action. The following are some options that should be considered:

- a) Reissue the recommendation, with changes, additional clarification and/or better information;
- b) Issue a new recommendation based on a reassessment of the risk of the underlying deficiency;
- c) Formally advise the action addressee of the recommendation as to the investigation authority's assessment of the response, including the reasons why the response is less than adequate;
- d) If appropriate, inform ICAO and/or other States about a less-than-adequate response to a recommendation;
- e) Issue a request for additional information from the safety recommendation action addressee; and/or
- f) Continue to monitor the progress of the safety action taken or planned.

## **6. ADDITIONAL GUIDANCE ON SAFETY RECOMMENDATIONS**

### **6.1 Qualities of a good safety recommendation**

The following are some qualities of a good safety recommendation:

- a) There is a clear and positive link to a safety significant event:
  - The challenge is to convince the unconvinced;
  - The potential for a safety recommendation to achieve change will be adversely affected if the underlying factor is not directly linked to the safety significant event; and
  - The logic of the argument to achieve change must be concise and clear.
- b) Data are accurate and indisputable:
  - All data must be validated and carefully scrutinized.
- c) The analysis is sound:
  - Use of assumptions or stretching data weakens the safety recommendation and reduces the chances that appropriate action will be taken.
- d) The safety recommendation is addressed to the entity best able to take the corrective action.
- e) The recommendation is achievable:
  - It will be a waste of effort to produce an unachievable recommendation;
  - An unachievable recommendation will diminish the credibility of the accident investigation authority; and

Version: Amendment 1

Effective Date: **01 April 2016**

Latest revision: **01**

Issue Number: **Issue 1**

Document Classification: Restricted

Page 56 of 62



## **Manual of Procedure Accidents and Incidents Investigation Division**

- It is inadvisable to shy away from issuing recommendations on difficult issues.
- f) There is a significant risk in being too prescriptive:
  - The action addressee is likely in a better situation to determine the most appropriate method to mitigate the risk; and
  - The credibility of the accident investigation authority may be at risk.
- g) A performance-based recommendation will make the action taken in response to a recommendation more measurable by both the accident investigation authority and the safety recommendation action addressee.
- h) A good recommendation is one that is written in a way that clearly states:
  - The deficiency (underlying factor and residual risk);
  - The action required to mitigate the risk (or to make the risk tolerable); and
  - The expected result of action being taken.

### **6.2 Characteristics of a weak recommendation**

The following are some characteristics of a weak safety recommendation:

- a) The action addressee is not identified:
  - There will be uncertainty as to who is responsible for taking the recommended safety action; and
  - There is a risk that no one will take on this responsibility and no action will be taken.
- b) Too many action addressees:
  - There will be uncertainty as to who is responsible for taking the recommended safety action and/or who will take the lead in coordinating the safety action to be taken.
- c) The action addressee does not have the mandate to mitigate the identified deficiency:
  - There is significant risk that safety action will not be taken.
- d) The addressee is not the one that can correct the deficiency on a systemic level:
  - There is significant risk that safety action will not be taken at the systemic level.
- e) The factual information is incorrect or inappropriately skewed:
  - The recommendation will lack credibility and no one will take action.
- f) The logic linking facts, analysis and conclusions is flawed:
  - The recommendation will lack credibility and no one will take action.
- g) The risk or consequences are exaggerated:
  - The recommendation will lack credibility and no one will take action.
- h) The recommendation is not based on a finding or a cause/contributing factor:
  - The recommendation will be interpreted as having a low priority; and
  - The safety action will be delayed or not taken at all.
- i) The recommendation is too specific:
  - The recommended safety action might not be the best option available to correct a systemic deficiency.
- j) The recommendation is too broad:
  - It will be difficult to determine the best option to mitigate the risk; and
  - Assessing the suitability of the safety action taken will be more difficult.
- k) The recommended action is not achievable:
  - The recommendation will lack credibility and no one will take action; and
  - The credibility of future recommendations by the accident investigation authority could be at risk.
- l) The performance expectations of the recommendation is unclear:
  - It will be more difficult to determine the best option to mitigate the risk; and



**Manual of Procedure  
Accidents and Incidents Investigation Division**

- It will be more difficult to assess whether the safety action taken meets the expectations of the recommendation.
- m) Too many recommendations in a report:
  - Having too many recommendations will possibly dilute their overall importance.
- n) Recommendations made on low-risk issues:
  - The recommendations collectively will be deemed to be of low priority; and
  - The credibility of future recommendations by the accident investigation authority could be at risk.
- o) A recommendation based on a single, local event:
  - The recommendation will be deemed as being low priority; and
  - The safety action will be delayed or not taken at all.
- p) The recommendation is not clearly identified as such:
  - There is a risk that such recommendations will be overlooked; and
  - There is a risk that no safety action will be taken.

-END-

**Manual of Procedure  
Accidents and Incidents Investigation Division**

## Chapter 2 THE ACCIDENT/INCIDENT DATA REPORTING (ADREP) SYSTEM

### 2.1 ADREP REPORTING SYSTEM — GENERAL

2.1.1 In accordance with Annex 13, States report to ICAO information on all aircraft accidents which involve aircraft of a maximum certificated take-off mass of over 2 250 kg. ICAO also gathers information on aircraft incidents considered important for safety and accident prevention. Thorough accident and incident investigations identify safety issues in the aviation system, both at the airline level and at the national level. However, it is sometimes difficult to differentiate between isolated manifestations of a problem and systemic unsafe conditions with a potential for loss of life or property damage. Such safety issues must be validated; in part, this is done by comparing the accident and incident experience in question with the broader experience of the airline, the State and other States. This type of comparative analysis requires reliable and complete data. The Accident/Incident Data Reporting (ADREP) System operated by ICAO provides States with the data that will assist them in validating safety issues. Based on this validation process with its attendant assessment of risk, accident investigation authorities can offer meaningful recommendations for correcting unsafe conditions in the aviation system.

2.1.2 Detailed information concerning the reporting of accidents and incidents to the ADREP system is contained in Appendix 6 to Chapter 4 of the ICAO *Safety Management Manual (SSM)* (Doc 9859). In order to facilitate reporting, States can now use ICAO's online secure portal site to file notifications and ADREP reports. Alternatively, ADREP reports can be sent via an e-form or by means of an ADREP compatible format, such as the European Coordination Centre for Accident and Incident Reporting System (ECCAIRS).

Chapter 4 of ICAO Annex 13, and Chapter 4 of Part I of the Manual of Aircraft Accident and Incident Investigation (Doc 9756) contain the Standards, Recommended Practices, guidance and procedures for the notification of accidents and incidents.

Chapter 6 and the Appendix to Annex 13, and Chapter 1 of this manual contain the Standards, Recommended Practices, guidance and procedures for the Final Report of an investigation.

### 2.2 ADREP INFORMATION AVAILABLE TO STATES

2.2.1 When ADREP reports are received from States, the information is checked and stored in a database. The stored reports constitute a database of worldwide occurrences in order to provide States with the following services:

- a) annual safety reports, presenting statistical information under broad categories, such as the types of events which took place and the phases of operation in which they occurred;
- b) replies to States' requests for specific information. States wanting information on specific safety problems should forward their requests to ICAO at ADREP@icao.int. Replies will be sent via email; and
- c) a record for individual States. ICAO may provide any State, upon request, with the complete record of accidents and incidents reported by that State to ICAO, and thus serve as an occurrence database for States that wish to take advantage of this service.

2.2.2 The ICAO ADREP database of accident and incident information is used to provide States with flight safety information. States' administrations are encouraged to request ADREP information from ICAO in order to assist them in their accident or incident investigation and prevention efforts. For example, if it is suspected in an investigation that

Version: Amendment 1

Latest revision: 01

Document Classification: Restricted

Effective Date: 01 April 2016

Issue Number: Issue 1

Page 59 of 62

# **Manual of Procedure Accidents and Incidents Investigation Division**

a specific malfunction or failure has occurred, information on similar occurrences may be helpful in the investigation. ADREP information is also used by States for accident prevention studies, including those prompted by operators, manufacturers and safety organizations. This safety information is provided by ICAO with the understanding that the ADREP information will be used for accident prevention only.

## **2.3 DATA VALIDITY**

The validity of the safety information which ICAO provides to States depends on the detail and care with which accidents and incidents have been investigated and reported to ICAO. Thus, it is in the interest of all States to accurately report all investigated occurrences in accordance with Annex 13. Only then can ICAO provide valid and complete information required for accident prevention.

## **2.4 ADREP PRELIMINARY REPORT**

2.4.1 Basic factual and circumstantial information on an accident is usually available within the first two to four weeks of the investigation. The ADREP Preliminary Report form is a simple and standard method for reporting such preliminary information. Although the Preliminary Report is not compulsory for incidents, States are encouraged to use the Preliminary Report for investigations conducted into serious incidents.

2.4.2 The specific information needed to complete an ADREP Preliminary Report can be found at <http://icao.int/safety/reporting>.

2.4.3 In accordance with Annex 13, Chapter 7, 7.1 and 7.2, an ADREP Preliminary Report is required, as follows:

### ***Accidents to aircraft over 2 250 kg***

7.1 When the aircraft involved in an accident is of a maximum mass of over 2 250 kg, the State conducting the investigation shall send the Preliminary Report to:

- a) the State of Registry or the State of Occurrence, as appropriate;
- b) the State of the Operator;
- c) the State of Design;
- d) the State of Manufacture;
- e) any State which provided relevant information, significant facilities or experts; and
- f) the International Civil Aviation Organization.

### ***Accidents to aircraft of 2 250 kg or less***

7.2 When an aircraft, not covered by 7.1, is involved in an accident and when airworthiness or matters considered to be of interest to other States are involved, the State conducting the investigation shall forward the Preliminary Report to:

- a) the State of Registry or the State of Occurrence, as appropriate;
- b) the State of the Operator;
- c) the State of Design;
- d) the State of Manufacture; and
- e) any State which provided relevant information, significant facilities or experts.

**Manual of Procedure  
Accidents and Incidents Investigation Division**

2.4.4 The Preliminary Report shall be sent using the ICAO online secure portal or by facsimile, email or airmail within thirty days of the date of the accident unless the Accident/Incident Data Report has been sent by that time. When matters directly affecting safety are involved, it shall be sent as soon as the information is available and by the most suitable and quickest means available.

## **2.5 ADREP ACCIDENT/INCIDENT DATA REPORT**

2.5.1 When the investigation has been completed and the Final Report has been released, the Accident/Incident Data Report has to be compiled. The purpose of the Data Report is to provide accurate and complete information in a standard format.

2.5.2 The information needed to complete an ADREP Accident/Incident Data Report can be found at <http://icao.int/safety/reporting>.

2.5.3 In accordance with Annex 13, Chapter 7, 7.5 and 7.7, the Accident/Incident Data Report is to be sent, as follows:

### ***Accidents to aircraft over 2 250 kg***

7.5 When the aircraft involved in an accident is of a maximum mass of over 2 250 kg, the State conducting the investigation shall send, as soon as practicable after the investigation, the Accident Data Report to the International Civil Aviation Organization. . . .

### ***Incidents to aircraft over 5 700 kg***

7.7 If a State conducts an investigation into an incident to an aircraft of a maximum mass of over 5 700 kg, that State shall send, as soon as is practicable after the investigation, the Incident Data Report to the International Civil Aviation Organization.”

2.5.4 The ADREP Data Report shall be sent to ICAO using the ICAO online secure portal or by facsimile, e-mail, or airmail as soon as possible after the release of the Final Report on the investigation. The State conducting the investigation should, upon request, provide other States with pertinent information additional to that made available in the Accident/Incident Data Report.

2.5.5 If, at the end of the investigation, it is established that some of the data in the Preliminary Report was not correct or was incomplete, this should be reflected in the Accident/Incident Data Report. When ICAO receives the Accident/Incident Data Report, the Preliminary Report information will be updated. Similarly, if a State reopens an investigation, the information previously reported should be amended by a new report.

2.5.6 If an accident/incident investigation has been completed and the Accident/Incident Data Report can be compiled within thirty days of the date of the accident, the State conducting the investigation should send an Accident/Incident Data Report to ICAO, instead of a Preliminary Report. In such cases, this State should also send the Data Report to the States which normally would have received the Preliminary Report.



**Manual of Procedure  
Accidents and Incidents Investigation Division**

**2.6 CONSTRAINTS ON INCIDENT DATA REPORTS**

Considering the sensitivity related to the dissemination of incident information, the following constraints are placed upon the use of incident data by ICAO:

- a) ICAO will use incident information for the purpose of accident prevention only;
- b) when ICAO conducts analyses based on incident information, it will be identified as such; and
- c) ICAO will de-identify incident reports before their dissemination, by deletion of the State of Registry, the nationality and registration marks, and the name of the owner and operator.

-END-