


STANDARD ARRIVAL CHART - INSTRUMENT (STAR) - ICAO

TRANSITIONAL ALTITUDE
8000'
TRANSITIONAL LEVEL
ATC

RADAR APP S: 124.50 TWR E: 118.60
E: 124.50 W: 118.10
W: 123.70 ATIS: 126.20
DIR: 121.40 : 115.20
ACC N: 126.70 SMC: 121.90

JOHANNESBURG
(O.R. TAMBO INTERNATIONAL)
RNAV (GNSS) RWY 03R
AVAGO 1C

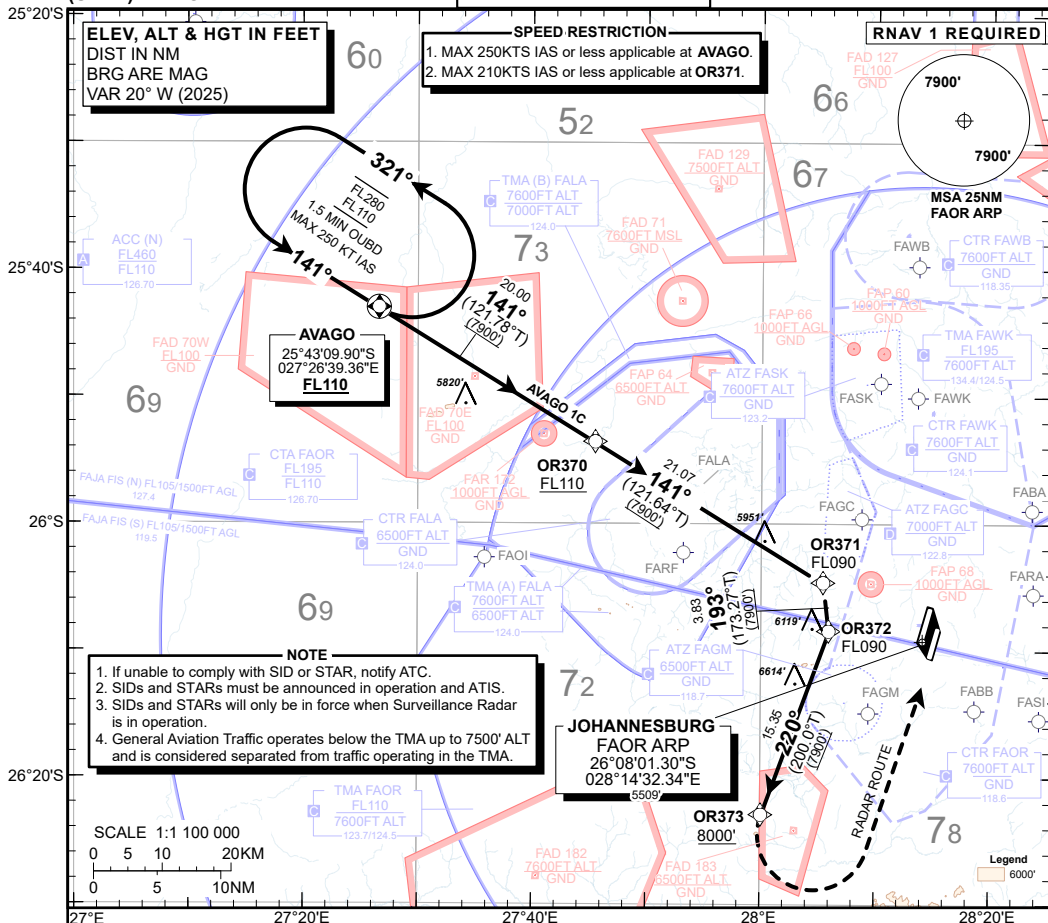

AVAGO 1C:
RWY 03R

To OR370 at FL110 or above, to OR371, turn right to OR372, to OR373 at 8000FT or above.
At OR373 continue on track 220°M, expect radar vectors RWY 03R.

COMMUNICATION FAILURE PROCEDURE (Squawk 7600)

Before AVAGO: Proceed to AVAGO and enter the AVAGO 1C RNAV (GNSS) hold. Hold for 5 minutes at last assigned level (at or above FL110) Descend to FL130 in the hold or maintain last assigned level if below FL130. Leave AVAGO on the "After AVAGO" Communication Failure Procedure.

After AVAGO: Continue on the AVAGO 1C RNAV (GNSS) STAR. At OR373 to VEKOP. At VEKOP, continue on the RNAV (GNSS) APCH RWY 03R.

CHANGE: OR372, OR373, & Hold direction, ARP Elevation).

ACSP: ATNS