


STANDARD ARRIVAL CHART - INSTRUMENT (STAR) - ICAO

TRANSITIONAL ALTITUDE
8000'
TRANSITIONAL LEVEL
ATC

RADAR APP S: 124.50 TWR E: 118.60
E: 124.50 W: 118.10
W: 123.70 ATIS: 126.20
DIR: 121.40 : 115.20
ACC N: 126.70 SMC: 121.90

JOHANNESBURG
(OR. TAMBO INTERNATIONAL)
RNAV (GNSS) RWY 03R
NIBEX 1B

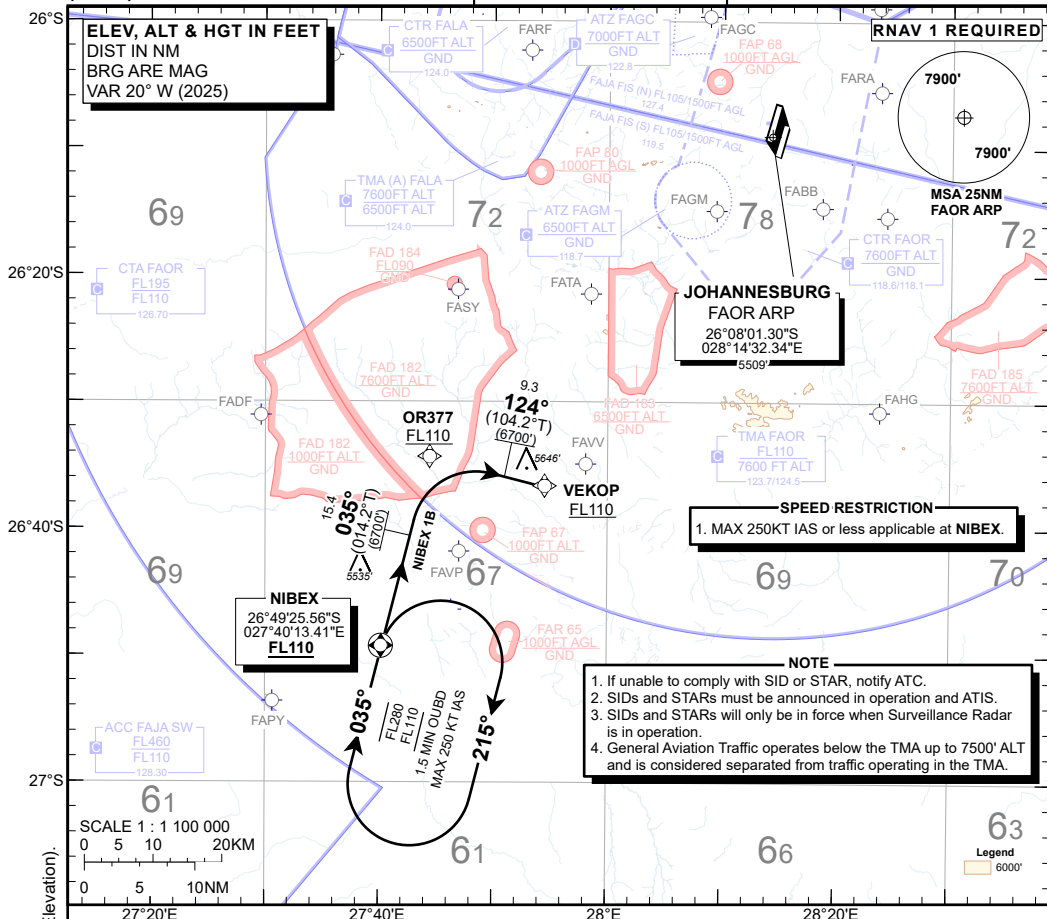

**NIBEX 1B:
RWY 03R**

To OR377 at FL110 or above, turn right to VEKOP at FL110 or above. At VEKOP, continue on the RNAV (GNSS) APCH RWY 03R.

COMMUNICATION FAILURE PROCEDURE (Squawk 7600)

Before NIBEX: Proceed to NIBEX and enter the NIBEX 1B RNAV (GNSS) hold. Hold for 5 minutes at last assigned level (**at or above FL110**) Descend to **FL130** in the hold or maintain last assigned level if below FL130. Leave NIBEX on the **"After NIBEX"** Communication Failure Procedure.

After NIBEX: Continue on the NIBEX 1B RNAV (GNSS) STAR. At VEKOP, continue on the RNAV (GNSS) APCH RWY 03R.

CHANGE: Maintenance (Waypoints: OR377, VEKOP & ARP Elevation):

EFF: 15 MAY 25

SOUTH AFRICAN



CIVIL AVIATION AUTHORITY

ARR-09

ACSP: ATNS